


1 2 3 4 6 7 8

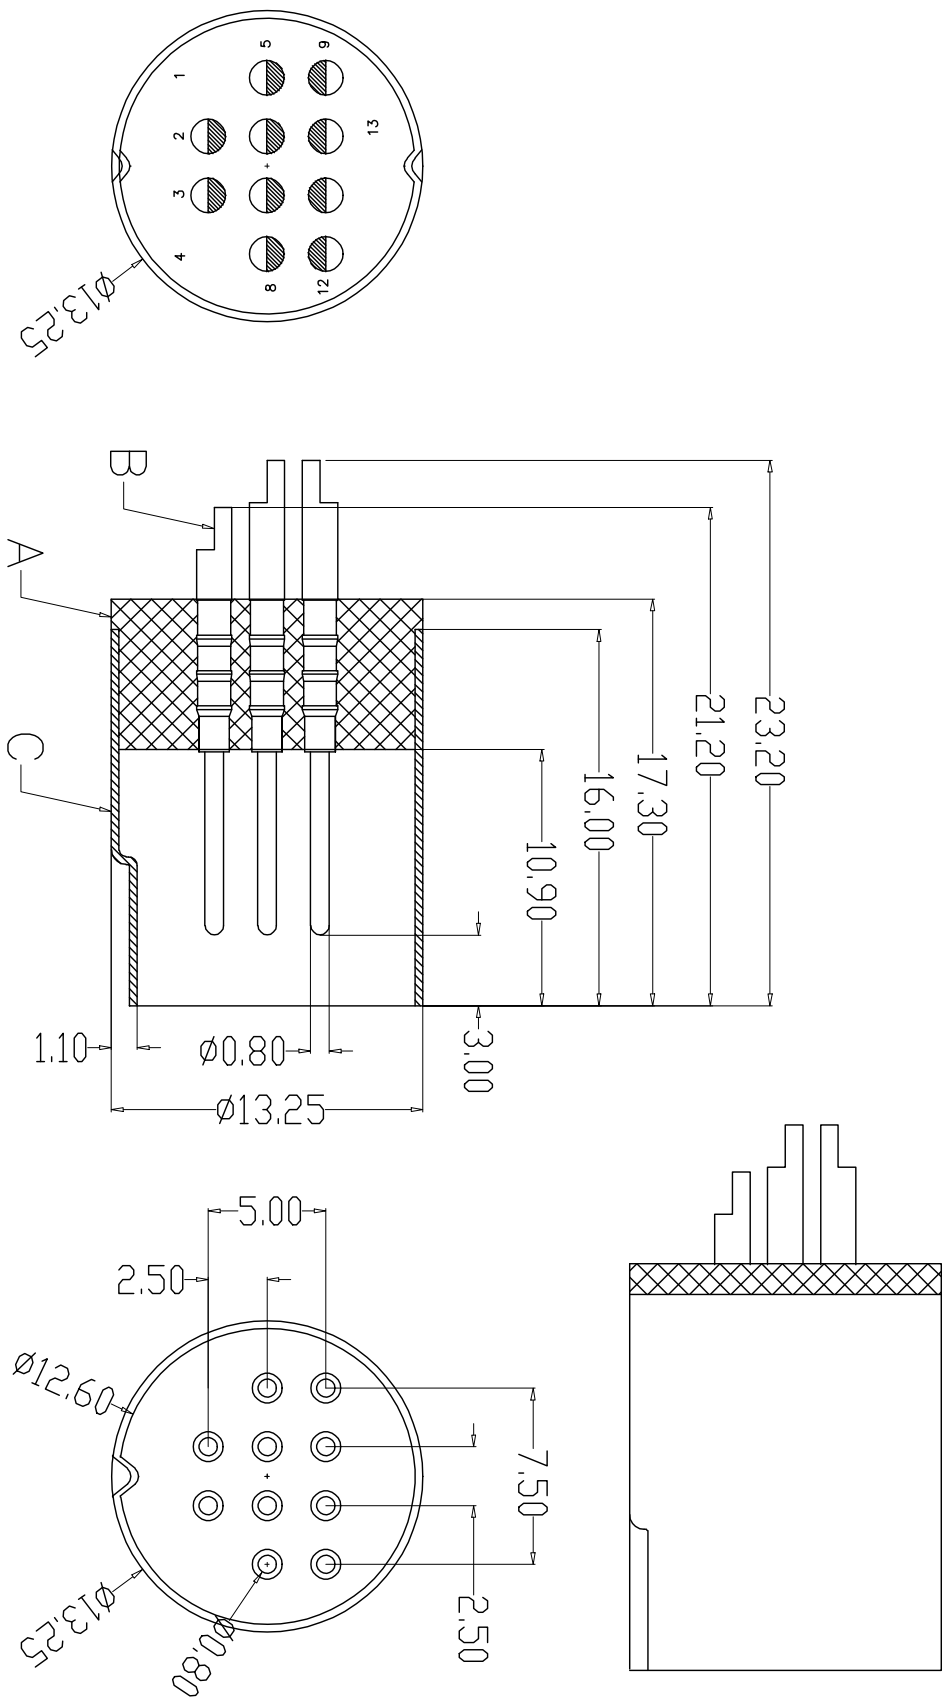

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PBT+GF	BLACK	1
B CONTACT	BRASS	NICKL PLATED	10
C SHELL	BRASS	NICKL PLATED	1
D			
E			
F			

Engagement force $\leq 100\text{N}$		Rated voltage 30V	
Disengagement force $\geq 35\text{N}$		Rated current 3A	
Mechanical lifespan ≥ 2000		Insulation resistance $\geq 1000\text{M}\Omega$	
IP rating IP94 V-0		Contact resistance $\leq 10\text{m}\Omega$	
Flammability		Operation Temperature $-40^\circ\text{C} \sim 105^\circ\text{C}$	

Dongguan Changjun Electronics Co., Ltd
 东莞市昌骏电子有限公司

标题: 扣型连接器壳体 长柄 (正向)

PART NO: CJ-D1N0-M01

DRIVING NO.: CJ-D1N0012

SCALE: 1:1

SIZE: REV A/0

DATE: 2022-01-05

TOLERANCE
 .xxx ±0.05
 .xx ±0.10
 .x ±0.20
 ANGLE ±1°

DRAWN: Xie Wenjun
 CHECKS: Long Jichang