
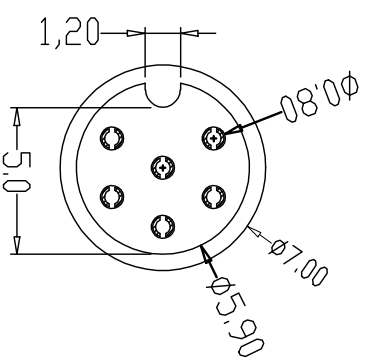


A	1	2	3	4	6	7	8
B	2pin RED	3pin YELLOW	4pin BLUE	5pin GREEN	6pin BLACK		

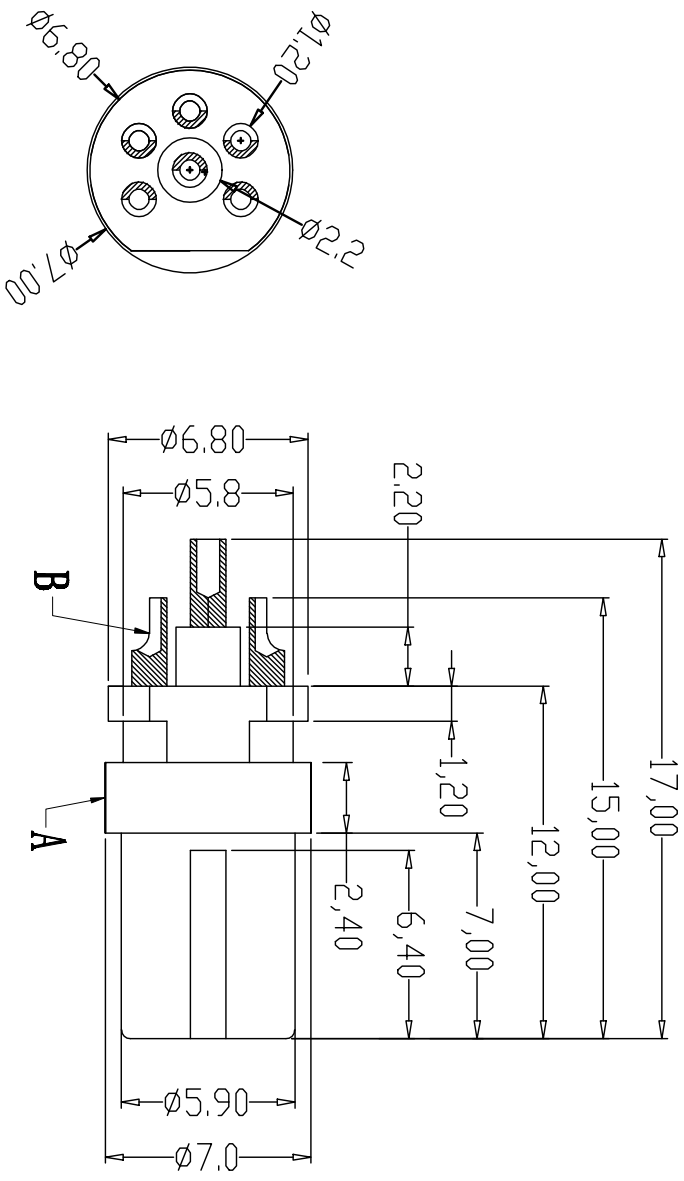

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

G	Engagement force	≤20N	Rated voltage	30V
	Disengagement force	≥5N	Rated current	2A
	Mechanical lifespan	≥500	Insulation resistance	≥1000M $\Omega$
H	IP rating	IP65/IP67	Contact resistance	≤10m $\Omega$
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS		MATERIALS		TREATMENT		AMOUNT
A	HOUSING	PBT+GF		SPECIFY COLOR		1
B	CONTACT	BRONZE		GOLD PLATED		2*6

Dongguan Changjun ElectronicsCo., LTD  
东莞市昌骏电子有限公司

TOLERANCE	±0.05	TITLE:	插座 mini 插板 PCB 插座插母头
.xxx	±0.10	PART NO.:	CJ-MS01 (2*6)-F01
.xx	±0.20	DRWG NO.:	CP-MS010003
.x	±0.50	SHEET:	SCALE: 1:1
ANGLE	±1°	UNIT:	mm
		SIZE:	REV
		DATE:	A/0
DRAWN:	Xie Wenjun	CHECK:	Long Jichang
			2022-01-05