

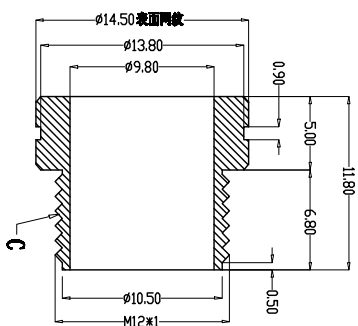






A		1		2		3	
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-000E 图形							

B	
B-000E 图形	
B-000E 图形	

C	
C-000E 图形	
C-000E 图形	

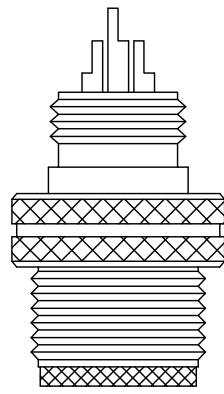

由 Autodesk 教育版产品制作

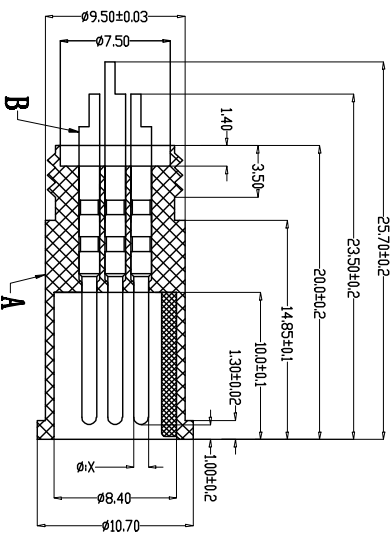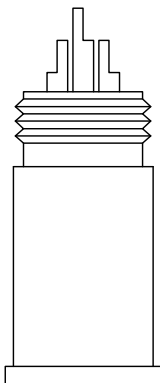

G	
Engagement force	≤50N
Disengagement force	≥5N
Mechanical lifespan	≥500
IP rating	IP67/IP68
Flammability	UL94 V-0

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRASS	NICKEL PLATED	2*8
C NUT	BRASS		1

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司

TITLE: M12防水型“母”连接器总成(4+11.8L)系列插针端盖

TOLERANCE: .xxx ±0.05, .xx ±0.10, .x ±0.20, ANGLES ±1°

PART NO: CF-4128(4+11.8L)

DRAWING NO.: CF-M120074

SHEET: 1 / 1

SCALE: 1 : 1

UNIT: mm

SIZE: REV A/0

DRAWN: Xie Wenjun

CHECK: Long Jichang

DATE: 2022-01-05