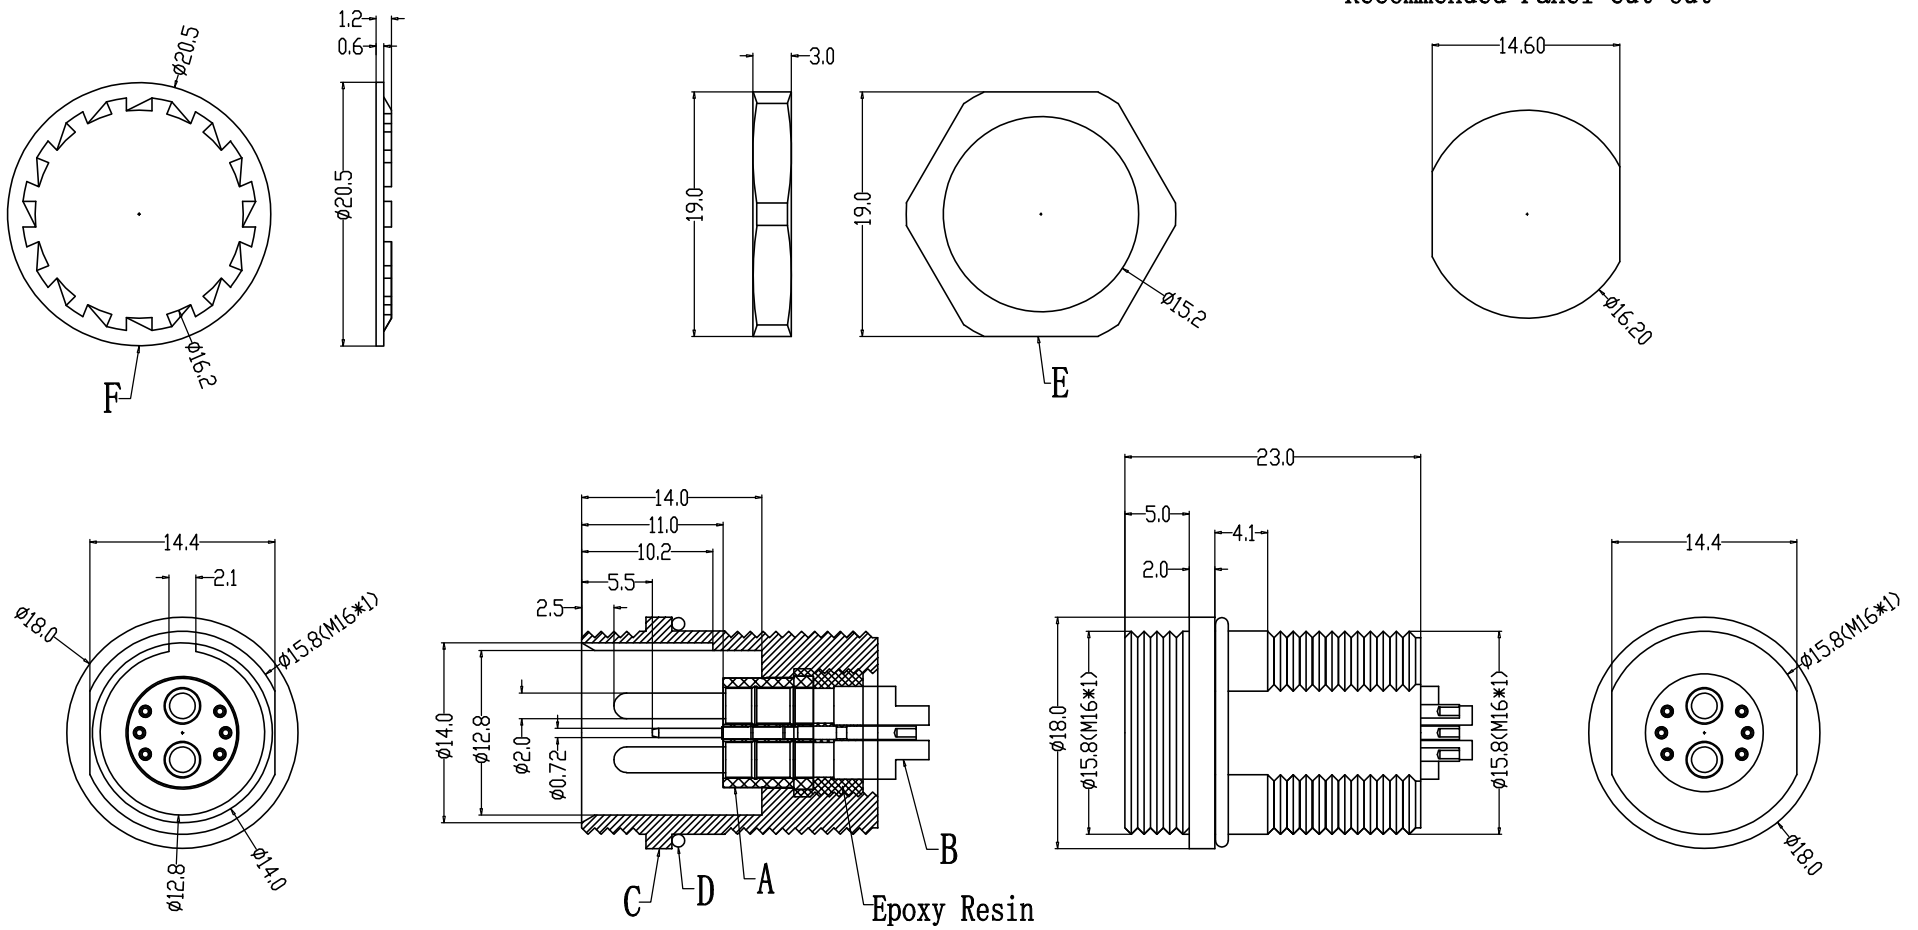

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PPS+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2+6
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	O-RING	EPDM	BLACK	1
E	NUT	BRASS	NICKL PLATED	1
F	SHIM	SPCE-SD	NICKL PLATED	1

Engagement force	≤80N	Rated volage	250V
Disengagement force	≥20N	Rated current	20A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP67/IP68	Contact resistance	≤20m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M16防水8P（2+6）线端公头L款 后锁面板式M16 F18T

PART NO: CJ-M16LXX8-M01H-M16F18T

DRAWING NO.: CP-M16L002

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2023-09-14