
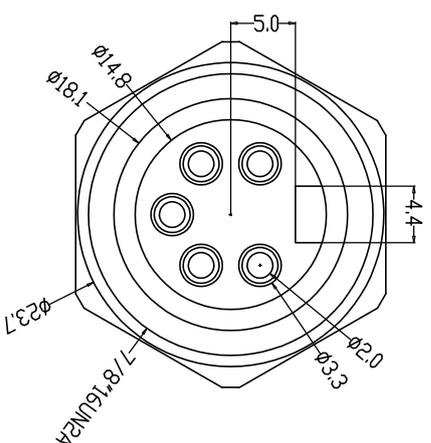
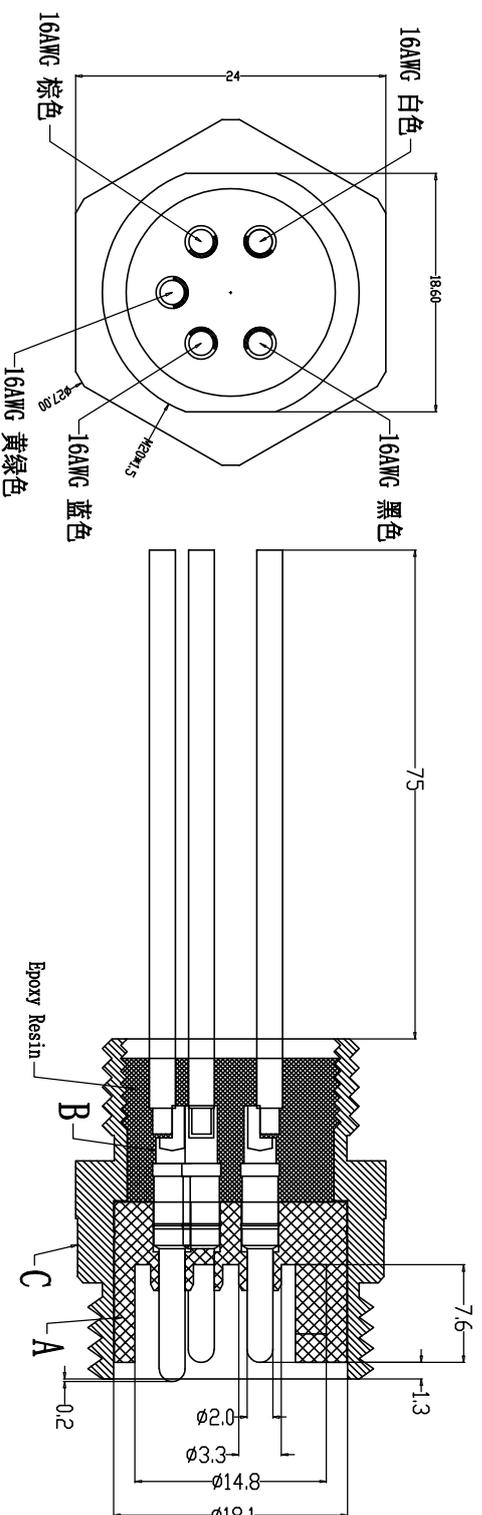


变更事项: 塑胶主体前移1.2MM.
 变更理由: 应客户要求。
 变更时间: 2025.07.02

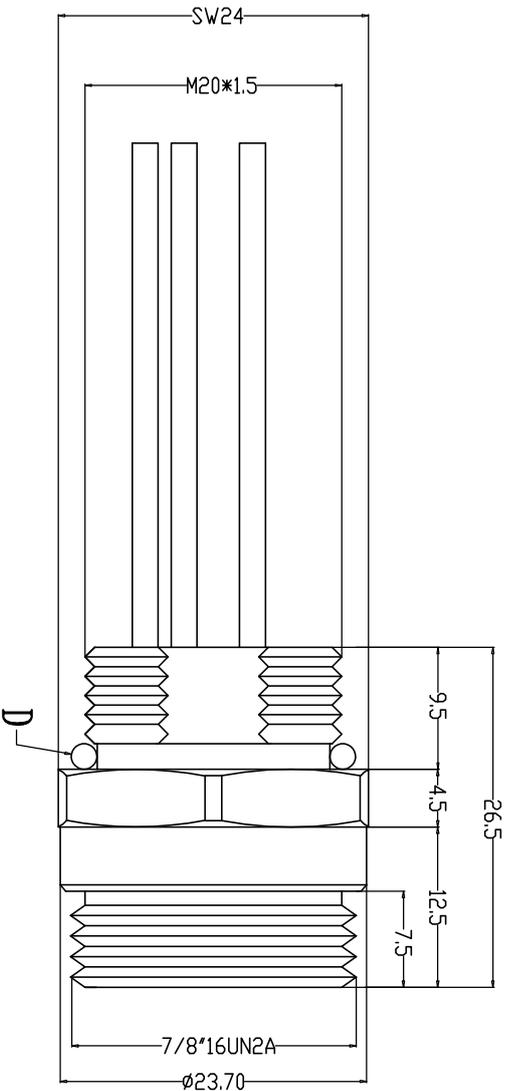

Engagement force	$\leq 60N$	Rated voltage	250V
Disengagement force	$\geq 20N$	Rated current	20A
Mechanical lifespan	≥ 500	Insulation resistance	$\geq 1000M \Omega$
IP rating	IP67/IP68	Contact resistance	$\leq 20m \Omega$
Flammability	UL94 V-0	Operation Temperature	$-40^{\circ}C \sim 105^{\circ}C$

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRASS		5
C OUTER CONTACT	BRASS	NICKEL PLATED	1
D O-RING	EPPDM	BLACK	1

Dongguan Changjun Electronics Co., LTD
 东莞市昌骏电子有限公司

TOLERANCE		TITLE:	
.xxx	± 0.05	7/8-16UN2A防水IP67端子后侧面式M20 SW24T带线	
.xx	± 0.10	PART NO:	
.x	± 0.30	CJ-A230X16-M01H-M20SW24T-X	
ANGLE	$\pm 1^{\circ}$	SHEET:	
		1 / 1	
DRAWN:	Xie Wenjun	CHECK:	Long Jichang
DATE:	2022-12-12	SCALE:	1 : 1
		UNIT:	mm
		SIZE:	A4
		REV:	A/0