
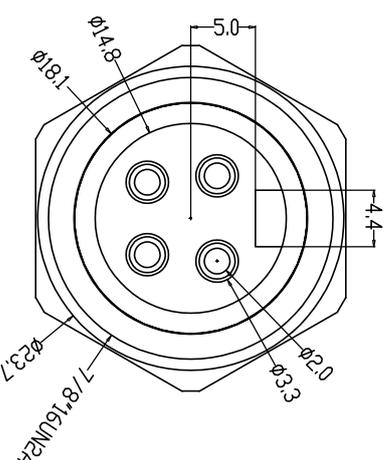
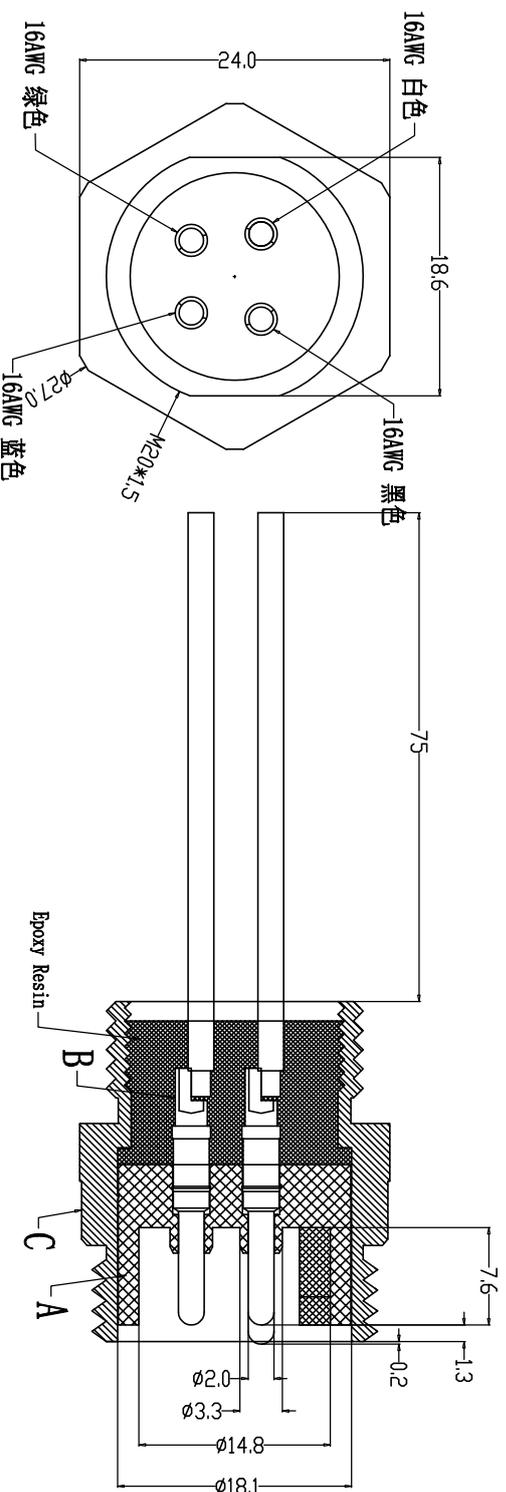


变更事项: 塑胶主体前移1.2MM.  
 变更理由: 应客户要求。  
 变更时间: 2025.07.02

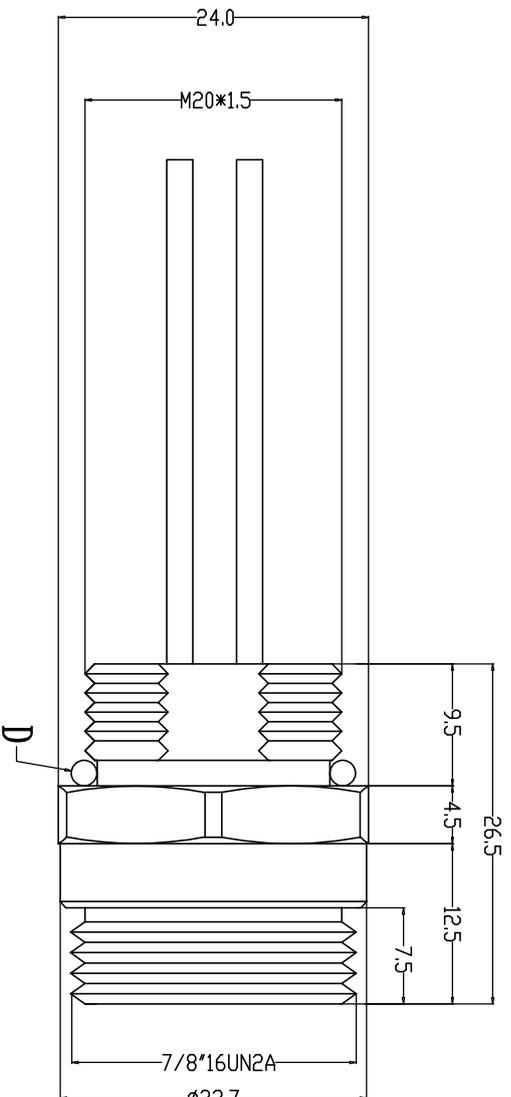

Engagement force	$\leq 60\text{N}$	Rated voltage	250V
Disengagement force	$\geq 20\text{N}$	Rated current	20A
Mechanical lifespan	$\geq 500$	Insulation resistance	$\geq 1000\text{M}\Omega$
IP rating	IP67/IP68	Contact resistance	$\leq 20\text{m}\Omega$
Flammability	UL94 V-0	Operation Temperature	$-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRASS		4
C OUTER CONTACT	BRASS	NICKEL PLATED	1
D O-RING	EPPDM	BLACK	1

Dongguan Changjun Electronics Co., LTD  
 东莞市昌俊电子有限公司

TITLE:		7/8-16UN2A防水4线端子后侧面式M20 5M24T带线	
PART NO:	CJ-A230XH-M01H-M20S24T-X	DRAWING NO.:	CP-M230028
SHEET:	1 / 1	SCALE:	1 : 1
UNIT:	mm	SIZE:	A4
DATE:	2024-11-19	REV:	A/0
DRAWN:	Xie Wenjun	CHECK:	Long Jichang