
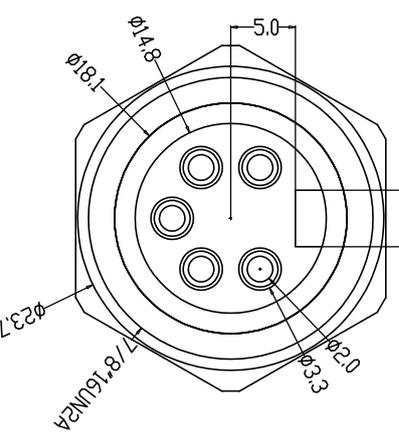


Recommended Panel Cut-out

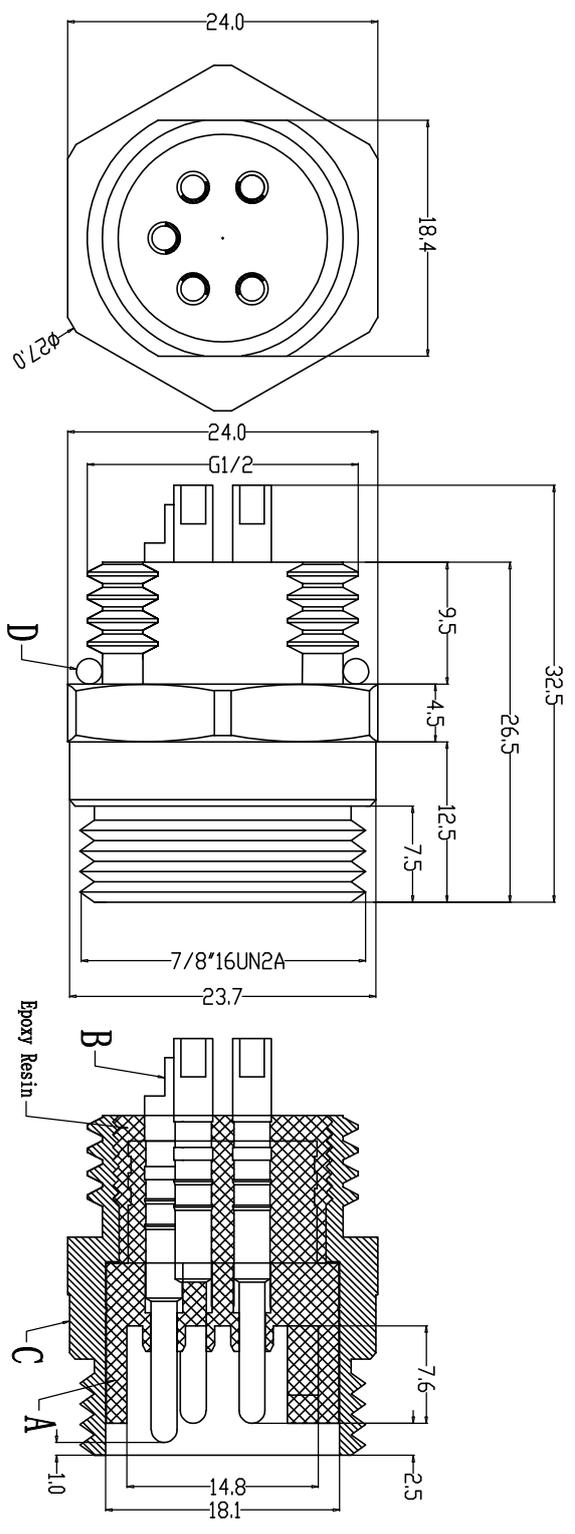

A	3pin	4pin	5pin	6pin
B	图形			
C				
D				
E				
F				
G				
H				
I				
	Engagement force	≤60N	Rated voltage	250V
	Disengagement force	≥20N	Rated current	20A
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
	IP rating	IP67/IP68	Contact resistance	≤20m Ω
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	3~6
B CONTACT	BRASS	NICKL PLATED	1
C OUTER CONTACT	BRASS	BLACK	1
D 0-RING	EPPDM	NICKL PLATED	1
E NUT	BRASS		1
F			

Dongguan Changjun Electronics Co., LTD
东莞市昌俊电子有限公司

7/8-16UN2A防水3*0°线端头 后面板式G1/2 S24T

TITLE:			
PART NO:			
CI-MAXX(C)*D-30H-G1/2S24T			
SHEET:	SCALES:	UNIT:	SIZE:
1 / 1	1 : 1	mm	A4
DRAWN:	CHECK:	DATE:	
Xie Wenjun	Long Jichang	2024-01-31	

TOLERANCE: ±0.05, ±0.10, ±0.30, ±0.50
 ANGLE: ±1°
 DRAWING NO.: CP-M230025
 REV: A/0