
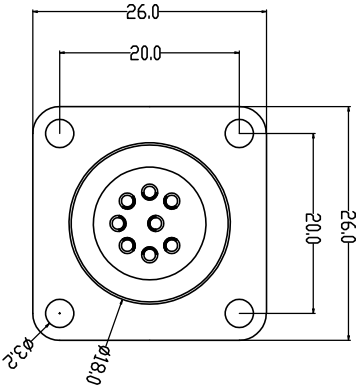

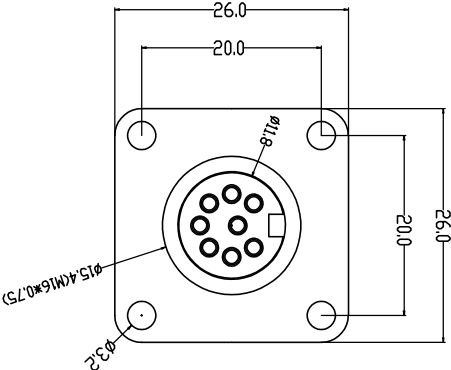



PIN数	3pin	3pin	4pin	5pin (180°)	5pin (240°)	6pin	7pin (45°)	7pin (60°)	8pin	12pin	14pin	16pin	19pin	24pin
图纸														
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm



Dongguan Changjun ElectronicsCo., LTD
东莞市昌骏电子有限公司

PARTS		MATERIALS	TREATMENT	AMOUNT	TITLE:			
A	HOUSING	PA66+GF	BLACK	1	M16防水24线端母头 法兰面板式20 526-14L			
B	CONTACT	BRASS	GOLD PLATED	2*24	DRAWING NO.: CP-M16A035			
C	OUTER CONTACT	BRASS	NICKL. PLATED	1	PART NO: G1-M16AX(2.0)-R010-28526-14L			
D	O-RING	EPDM	RED/BLACK	1+1	SCALE: 1:1			
E					UNIT: mm			
F					SIZE: A4			
G	Engagement force	≤60N	Rated voltage	2 80V~220V 12 190V~60V 240V~60V	DATE: 2024-04-14			
H	Disengagement force	≥15N	Rated current	2 80A~15A 12 19A~3A 240A~1A	REV A/0			
I	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω				
J	IP rating	IP65/IP67	Contact resistance	≤10m Ω				
K	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C				