



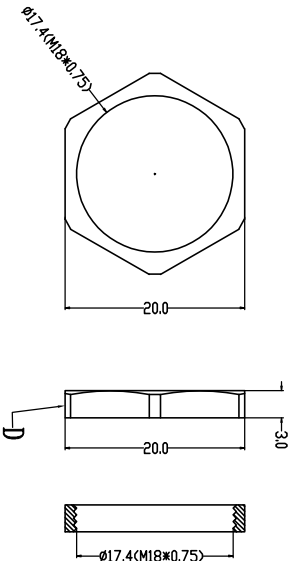



PIN数	3pin	3pin	4pin	5pin (180°)	5pin (240°)	6pin	7pin (45°)	7pin (60°)	8pin	12pin	14pin	16pin	19pin	24pin
图纸														
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm



Recommended Panel Cut-out



PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF	BLACK	1			

Engagement force	≤60N	Rated volage	2 80V~220V 12 19pin:60V 24pin:60V
Disengagement force	≥15N	Rated current	2 80pin:3A 12 19pin:3A 24pin:1A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C

Dongguan Changjun ElectronicsCo., LTD
东莞市昌骏电子有限公司

TOLERANCE		TITLE:	
.xxx	±0.05	M16*2~24P线端母头 后锁面板式M18 P20T	
.xx	±0.10	PART NO:	
.x	±0.30	CI-MIGAXC220-F01H-M18P20T	
x	±0.50	SHEET:	
ANGLE	±1°	SCALE:	
DRAWN:		CHECK:	
Xie Wenjun		Long Jichang	
DATE:		2023-05-05	