












		1		2		3		4		5		6		7		8	
A		2pin	2pin	3pin	3pin	4pin	4pin	4pin	4pin	5pin	6pin	8pin					
图形																	
B		CODE	A-code	A-防呆	A-code	A-防呆	A-code	A-防呆	D-code	B-code	A-code	A-code					
		X值	1.00	1.00	1.00	1.00	1.00	1.00	0.80	1.00	0.72	0.60					
A																	
B																	

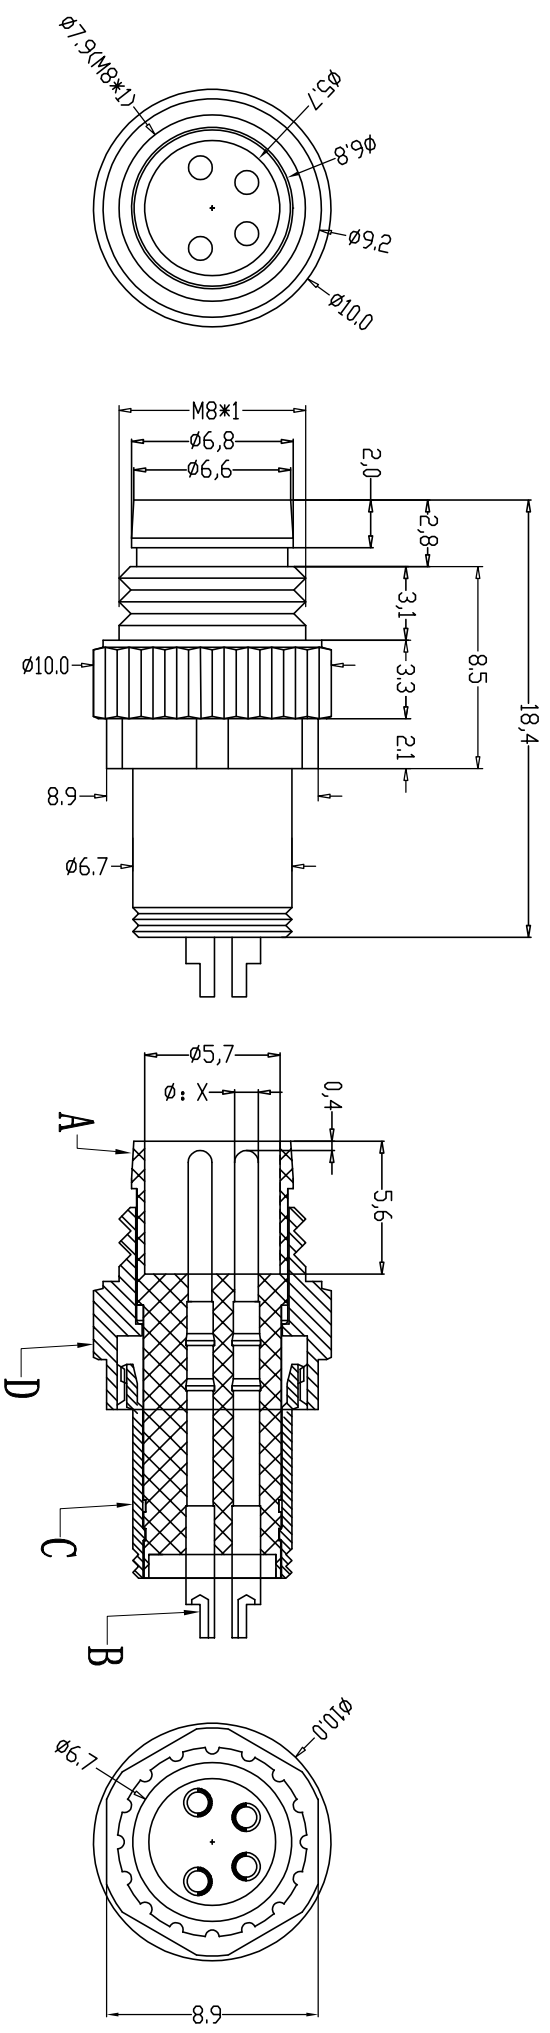

					PARTS		MATERIALS	TREATMENT	AMOUNT			
					A	HOUSING	PA66+GF	SPECIFY COLOR	1			
					B	CONTACT	BRASS	GOLD PLATED	2~8			
Engagement force						Rated volage	2-5pin:60V DC 6-8pin:30V DC					
Disengagement force					≥5N	Rated current	2-5pin:4A 6-8pin:2A	SHIELD	C			
Mechanical lifespan					≥500	Insulation resistance	≥1000MΩ	NICKL. PLATED	1			
IP rating					IP67/IP68	Contact resistance	≤10mΩ	NICKL. PLATED	1			
Flammability					UL94 V-0	Operation Temperature	-40° C~105° C		E			
					F							
										D	E	F