
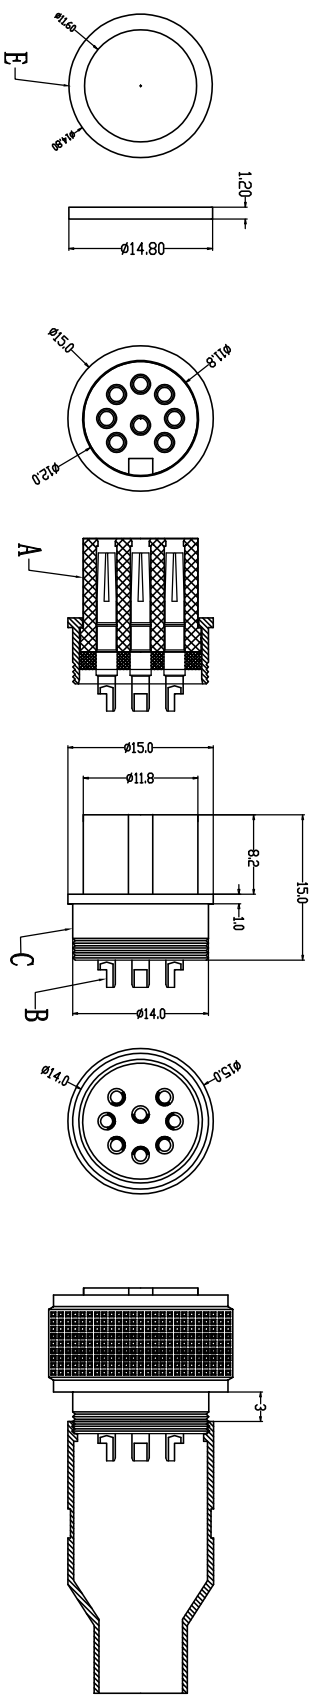


A		1		2		3		4		5		6		7		8	
PIN数	3pin	3pin	4pin	5pin(180°)	5pin(240°)	6pin	7pin(45°)	7pin(60°)	8pin	12pin	14pin	16pin	19pin	24pin			
图纸																	
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm			

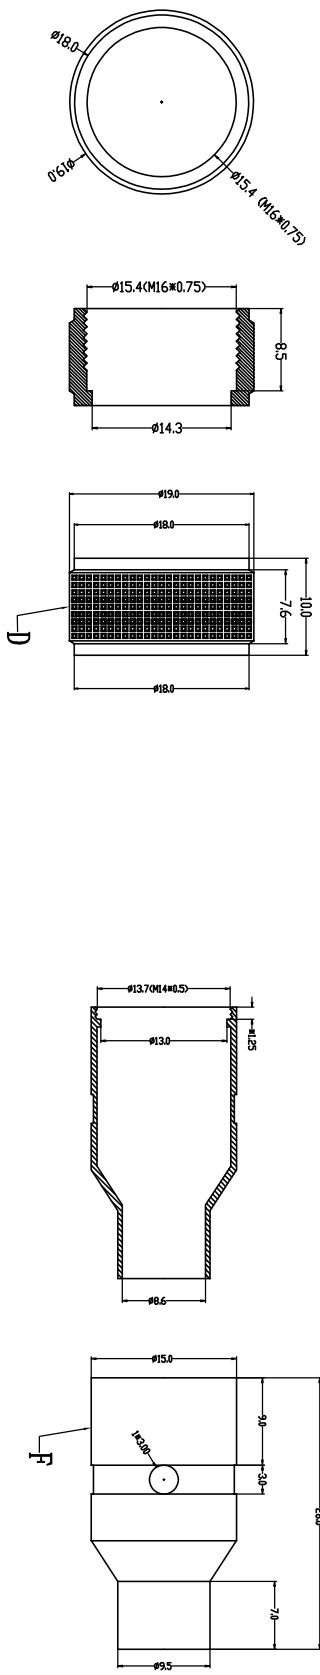

PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		BLACK		1	
B	CONTACT	BRASS		GOLD PLATED		2~24	
C	OUTER CONTACT	BRASS		NICKL PLATED		1	
D	NUT	BRASS		NICKL PLATED		1	
E	O-RING	EPDM		BLACK		1	
F	SHIELD	BRASS		NICKL PLATED		1	
Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司							
TITLE:		M16防水24芯线端母头(成型式)+10L方格纹螺母					
TOLERANCE:		±0.05 ±0.10 ±0.30 ±0.50					
PART NO:		CJ-M16AXB(Q*24)-F04					
SHEET:		SCALE:					
DRAWN:		CHECK:					
Xie Wenjun		Long Jichang					
DATE:		2023-12-15					