


		1		2		3		4		5		6		7	
		2pin	2pin	3pin	3pin	4pin	4pin	4pin	4pin	5pin	6pin	8pin			
图形															
CODE	A-code	A-防呆	A-code	A-防呆	A-code	A-防呆	D-code	B-code	A-code	A-code					
X值	1.00	1.00	1.00	1.00	1.00	1.00	0.80	1.00	0.72	0.60					

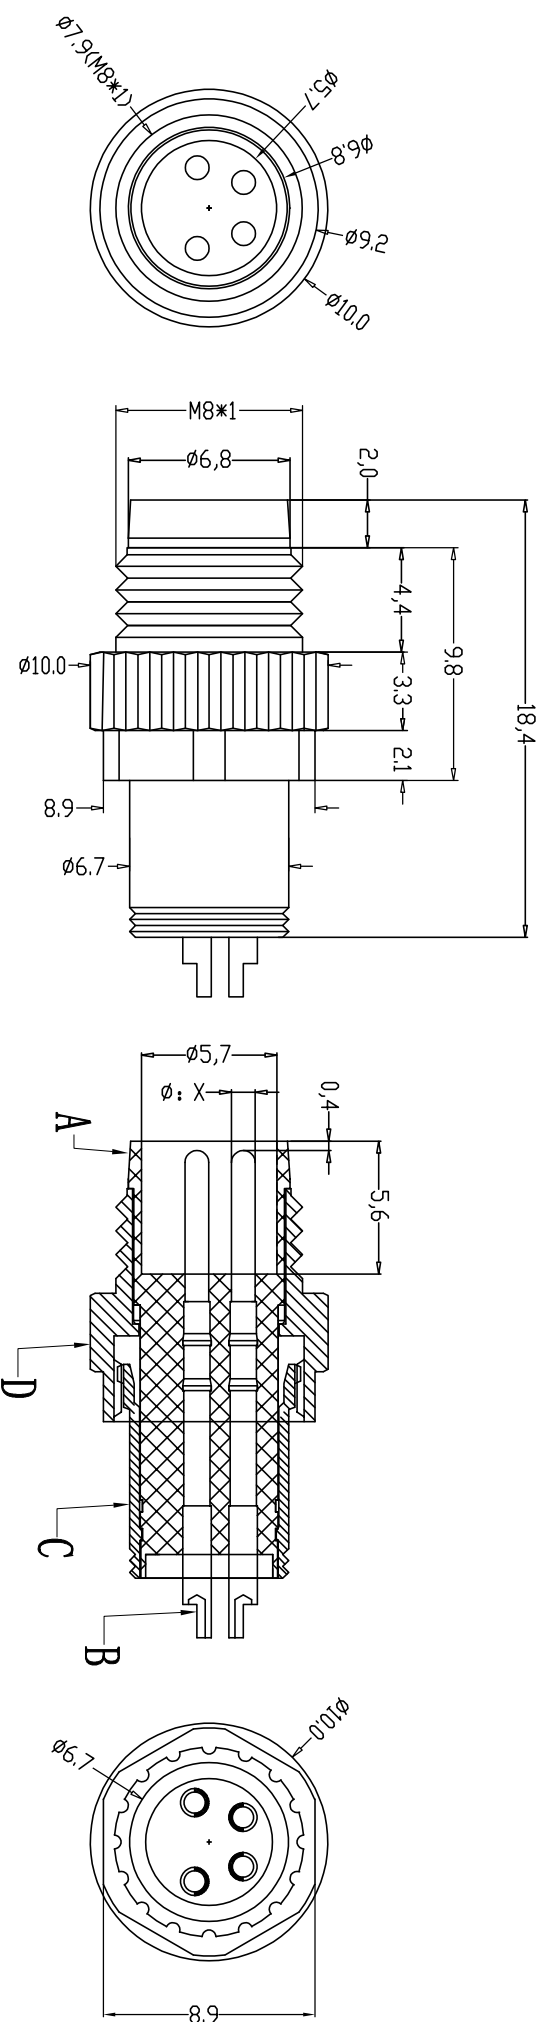

Dongguan Changjun Electronics Co., Ltd 东莞市昌骏电子有限公司										
		PARTS	MATERIALS	TREATMENT	AMOUNT					
						A	HOUSING	PA66+GF	SPECIFY COLOR	1
						B	CONTACT	BRASS	GOLD PLATED	2~8
						C	SHIELD	BRASS	NICKL. PLATED	1
						D	NUT	BRASS	NICKL. PLATED	1
						E				
Engagement force	≤40N	Rated voltage	2~5pin:60V DC 6~8pin:30V DC							
Disengagement force	≥5N	Rated current	2~5pin:4A 6~8pin:2A							
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω							
IP rating	IP67/IP68	Contact resistance	≤10m Ω							
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F						
						TITLE: 防水2~8线端子屏蔽款+9.8防振动六角直纹螺丝				
						TOLERANCE ±0.05 ±0.10 ±0.20 ±0.50 x x ±1° ANGLE				
						PART NO.: CJ-M8HXB(2~8)-M2-9.8L SHEET: 1 / 1 SCALE: 1 : 1 DRAWN: Xie Wenjun CHECK: Long Jichang DATE: 2026-03-27				
						DRAWING NO.: CP-M80167 UNIT: mm SIZE: A4 REV: A/0				