


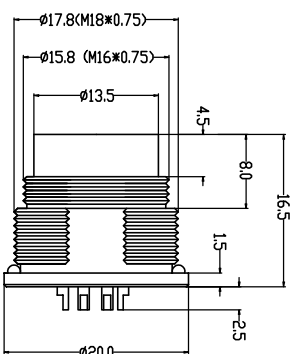
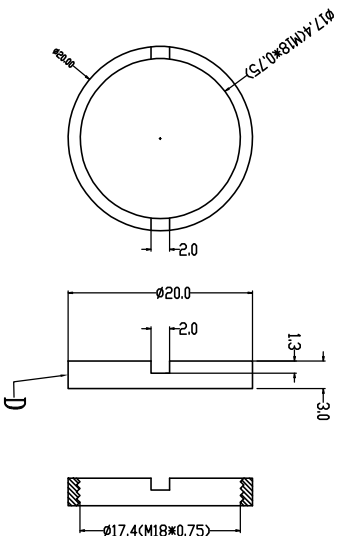



1		2		3		4		5		6		7		8	
PIN数	2pin	3pin	4pin	5pin (180°)	5pin (240°)	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin		
图纸															
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm		



Recommended Panel Cut-out

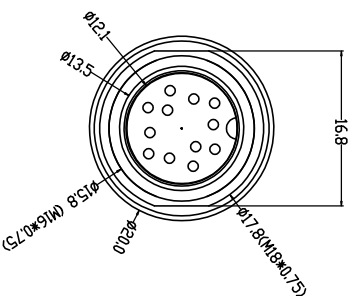

G	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司									
	PARTS		MATERIALS	TREATMENT	AMOUNT					
	A	HOUSING	PA66+GF	BLACK	1					
	B	CONTACT	BRASS	GOLD PLATED	2~24					
H	Engagement force	≤60N	Rated voltage	$2^{28}n:n:250V$ $12^{19}n:n:50V$ $24p:n:50V$	B	CONTACT	BRASS	GOLD PLATED	2~24	
	Disengagement force	≥15N	Rated current	$2^{8}n:n:5A$ $12^{19}n:n:3A$ $24p:n:1A$	C	OUTER CONTACT	BRASS	NICKL. PLATED	1	
	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	D	NUT	BRASS	NICKL. PLATED	1	
	IP rating	IP65/IP67	Contact resistance	≤10mΩ	E	O-RING	EPDM	RED/BLACK	1	
	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C	F					
TOLERANCE										
±0.05 ±0.10 ±0.30 ±0.50 x x x ANGLE ±1°										
TITLE: M16防水24线插头 前锁面板式M18 F20T-2.5L										
PART NO: DRAMING NO.: CJ-M16AXX240-40(C)M1820T-2.5L										
SHEET: SCALE: UNIT: SIZE: REV 1 / 1 1 : 1 mm A4 A/0										
DRAWN: Xie Wenjun CHECK: Long Jichang DATE: 2025-06-16										