





PIN数	2pin	3pin	4pin	5pin (180°)	5pin (240°)	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin
图纸													
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

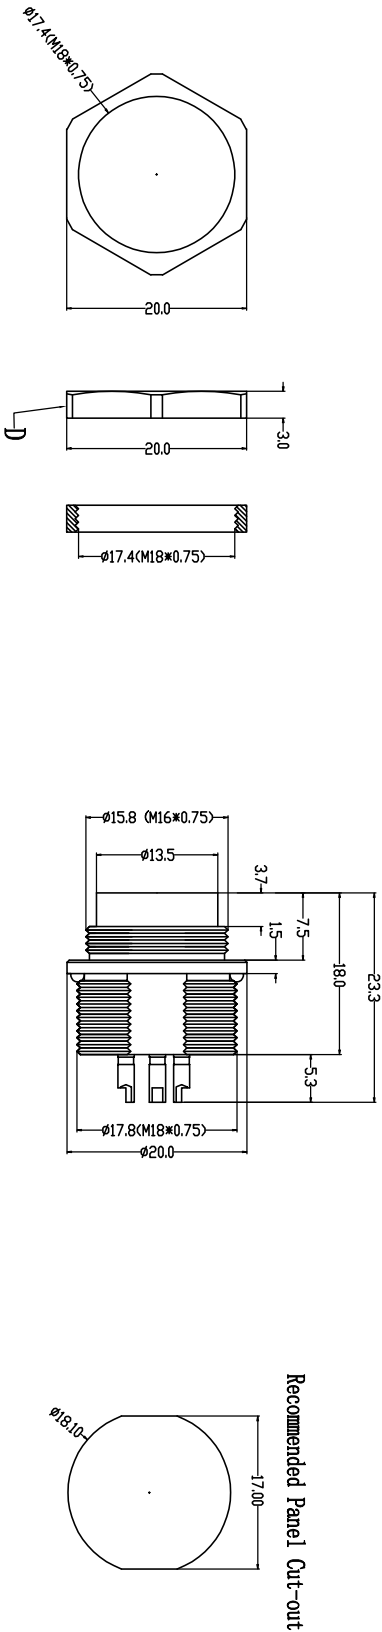

PARTS	MATERIALS	TREATMENT	AMOUNT	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司			
A HOUSING	PA66+GF	BLACK	1	TITLE: M16防水24针线端公头 后锁面板式M18 F20T PART NO: CP-M16A023 SHEET: 1 / 1 SCALE: 1 : 1 UNIT: mm SIZE: A4 REV: A/0			

Engagement force	≤60N	Rated volage	2 80V~220V 12 190V~60V 240V~60V	B CONTACT	BRASS	GOLD PLATED	2~24	TITLE: M16防水24针线端公头 后锁面板式M18 F20T PART NO: CP-M16A023 SHEET: 1 / 1 SCALE: 1 : 1 UNIT: mm SIZE: A4 REV: A/0				
Disengagement force	≥15N	Rated current	2 80V~5A 12 190V~3A 240V~1A	C OUTER CONTACT	BRASS	NICKL. PLATED	1					
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D NUT	BRASS	NATURAL COLOR	1					
IP rating	IP65/IP67	Contact resistance	≤10m Ω	E O-RING	EPDM	RED/BLACK	1					
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C	F								

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---