

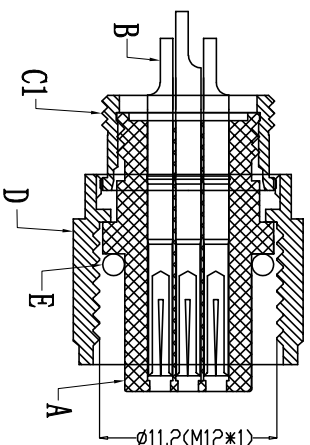
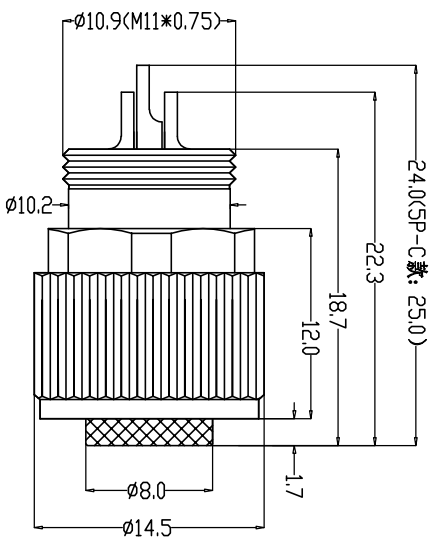

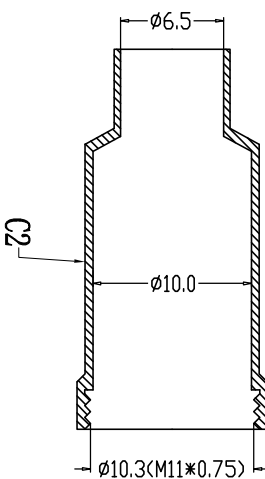
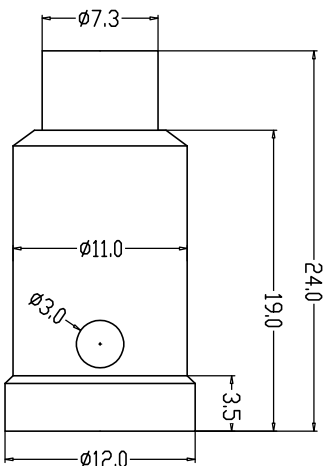


1		2		3		4	5	6	7	8
PIN位	2PIN	3PIN4芯3	4PIN	5PIN正方形	6PIN	7PIN	8PIN			
A-CODE 图形										

B-CODE 图形				
--------------	--	--	--	--

D-CODE 图形			
--------------	--	--	--

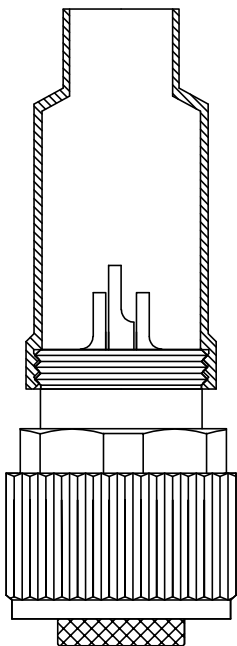

G	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司										G
	PARTS		MATERIALS	TREATMENT	AMOUNT						
	A	HOUSING	PA66+GF	SPECIFY COLOR	1						
	B	CONTACT	BRONZE	GOLD PLATED	2~8						
Engagement force	≤50N	Rated volage	2.5pin:60V 6.8pin:80V	B	CONTACT	BRONZE	GOLD PLATED	2~8	TOLERANCE	±0.05 ±0.10 ±0.30 ±0.50 x x x ANGLE	
Disengagement force	≥5N	Rated current	2.5pin:4A 6.8pin:2A	C	OUTER CONTACT	BRASS	NICKL PLATED	1+1	PART NO:	CP-M120586	
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	NUT	BRASS	NICKL PLATED	1	SHEET:	SCALE:	
IP rating	IP67/IP68	Contact resistance	≤10m Ω	E	0-RING	EPDM	SPECIFY COLOR	1	1 / 1	1 : 1	
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F					DRAWN:	CHECK:	
									Xie Wenjun	Long Jichang	
										DATE:	
										2025-09-08	