
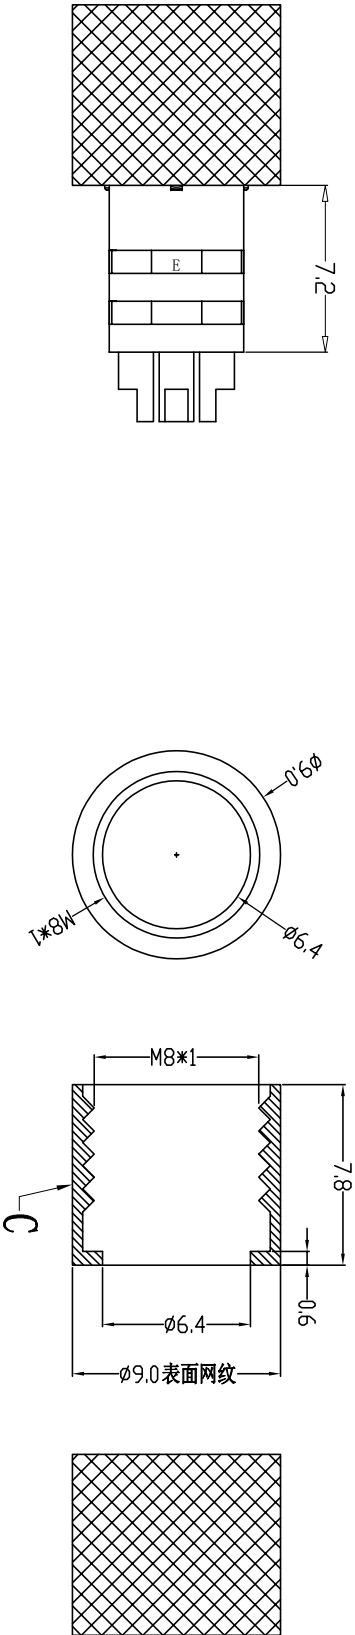


A	图形	2pin	2pin	3pin	3pin	4pin	4pin	4pin	5pin	6pin	8pin
		CODE	A-防呆	A-code	A-防呆	A-code	A-防呆	D-code	B-code	A-code	A-code
B	适配值	1.00	1.00	1.00	1.00	1.00	1.00	0.80	1.00	0.72	0.60

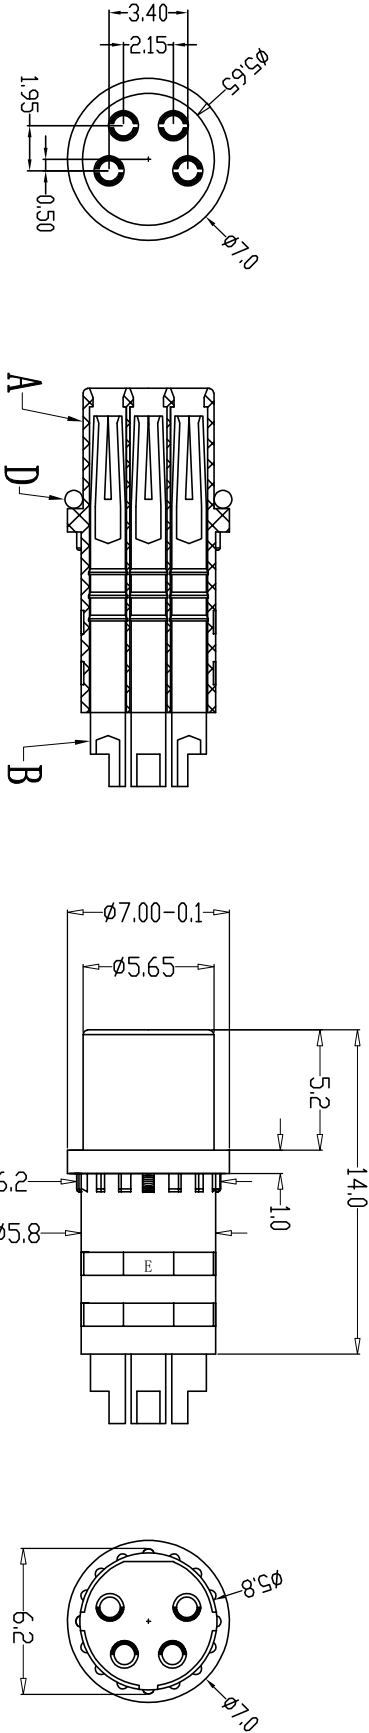

PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		SPECIFY COLOR		1	
B	CONTACT	BRONZE		GOLD PLATED		2*8	
C	NUT	BRASS		NICKL PLATED		1	
D	0-RING	EPDM		SPECIFY COLOR		1	

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

Engagement force		Rated voltage		2-5pin:60V DC 6-8pin:30V DC	
Disengagement force		Rated current		2-5pin:4A 6-8pin:2A	
Mechanical lifespan		Insulation resistance		$\geq 1000M \Omega$	
IP rating		Contact resistance		$\leq 10m \Omega$	
Flammability		Operation Temperature		$-40^{\circ}C \sim 105^{\circ}C$	
1	2	3	4	5	6
TITLE:		DRAWING NO.:		DRAWING NO.:	
DRAWN:		CHECK:		DATE:	
Xie Wenjun		Long Jichang		2024-05-30	