PIN数	3pin	3pin	4pin	5pin(180°)	5pin (240°)	6pin	7pin(45°)	7pin(60°)	8pin	12pin	14pin	16pin	19pin	24pin
图纸														
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

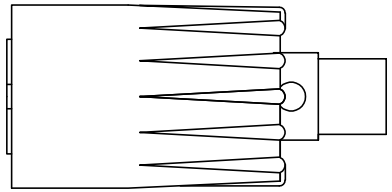



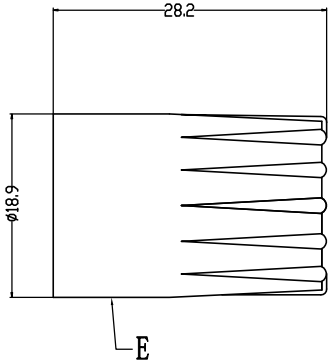





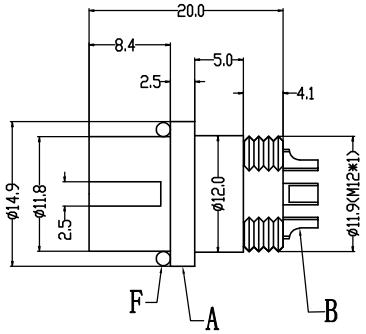







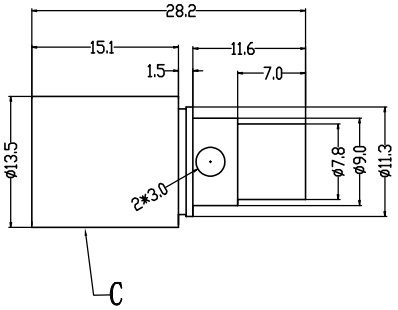

					PARTS	MATERIALS	TREATMENT	AMOUNT
				A	HOUSING	PA66+GF	BLACK	1
Engagement force	≤60N	Rated volage	2~8pin:250V 12~19pin:60V 24pin:60V	B	CONTACT	BRASS	GOLD PLATED	2~24
Disengagement force	≥15N	Rated current	2~8pin:5A 12~19pin:3A 24pin:1A	C	SHIELD	BRASS	NICKL PLATED	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	D	NUT	BRASS	NICKL PLATED	1
IP rating	IP65/IP67	Contact resistance	≤10mΩ	E	HOUSING	ABS	BLACK	1
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C	F	O-RING	EPDM	BLACK	1

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M16防水2~24P线端母头B款+28.2L屏蔽管+包胶螺母

PART NO:	DRAWING NO.:			
CJ-M16BXB(2~24)-F01	CP-M16A028			
SHEET: 1 / 1	SCALE: 1 : 1	UNIT: mm	SIZE: A4	REV A/0
DRAWN: Xie Wenjun	CHECK: Long Jichang	DATE: 2024-10-10		