PIN数	2pin	3pin	4pin	5pin（180°）	5pin（240°）	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin
图纸													
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

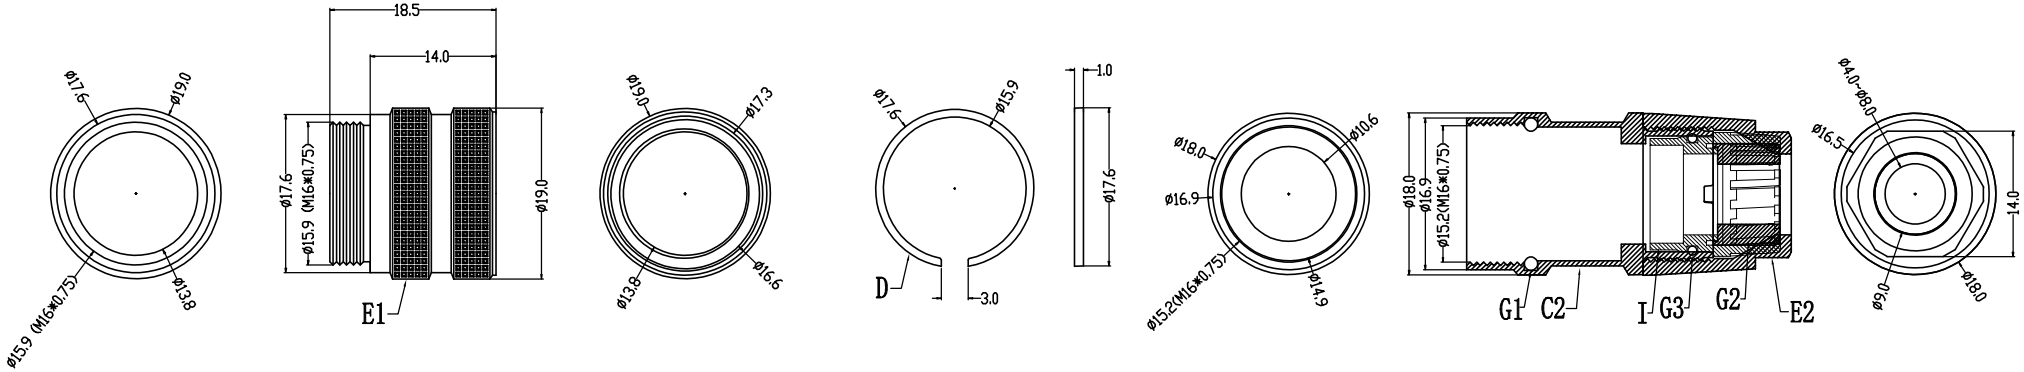

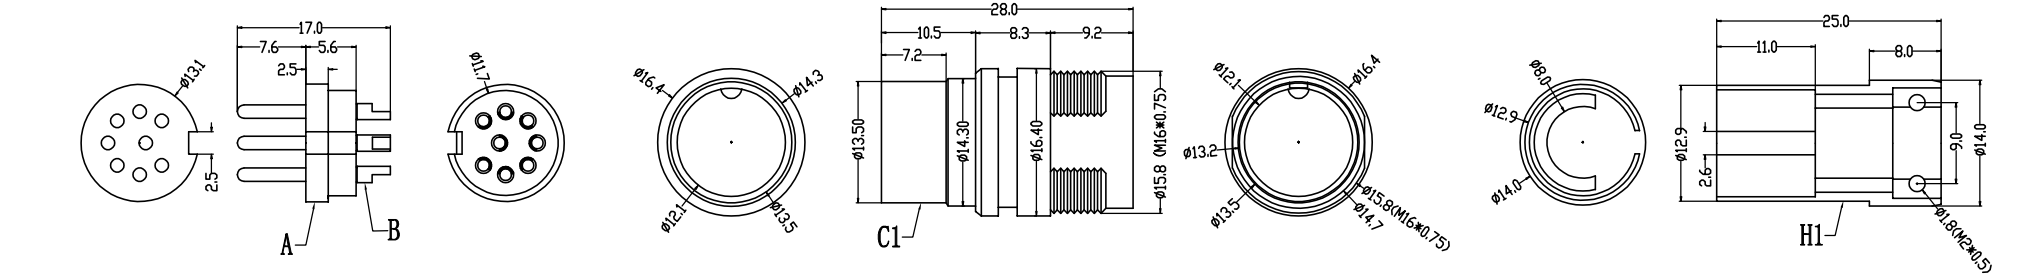

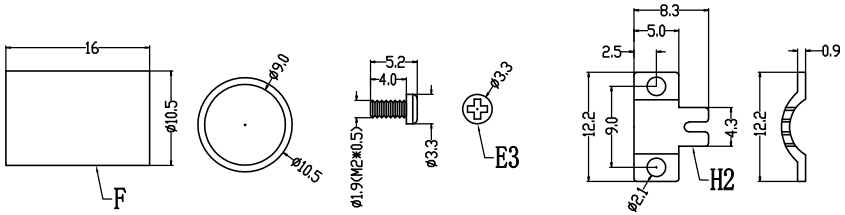

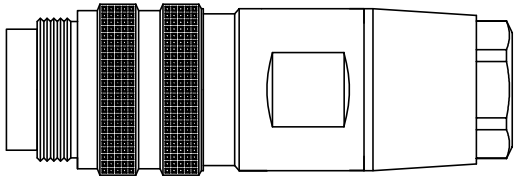

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	DIELECTRIC	PA66+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	2~24
C	OUTER CONTACT	ALALLOY BRASS	NICKL PLATED	1+1
D	SNAP RING	SS	NATURAL COLOR	1
E	NUT	BRASS SPCE-SD	NICKL PLATED	1+1+2
F	Insulating tube	PVC	TRANSLUCENT	1
G	O-RING	SILICA GEL	RED/BLACK	1+1+1
H	HOUSING	ALALLOY SPCE-SD	NICKL PLATED	1+1
I	CABLE CLAMP	PA66+GF	BLACK	1

Engagement force	≤60N	Rated volage	2~8pin:250V 12~19pin:60V 24pin:60V
Disengagement force	≥15N	Rated current	2~8pin:5A 12~19pin:3A 24pin:1A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C

Dongguan Changjun ElectronicsCo.,LTD

东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M16防水2~24P线端公头（五金组装式C款）

PART NO: CJ-M16AXB(2~24)-M02C

DRAWING NO.: CP-M16A020

SHEET:	SCALE:	UNIT:	SIZE:	REV
1 / 1	1 : 1	mm	A4	A/0

DRAWN:	CHECK:	DATE:
Xie Wenjun	Long Jichang	2024-05-05