






PIN数	3pin	3pin	4pin	5pin (180°)	5pin (240°)	6pin	7pin (45°)	7pin (60°)	8pin	12pin	14pin	16pin	19pin	24pin
图纸														
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

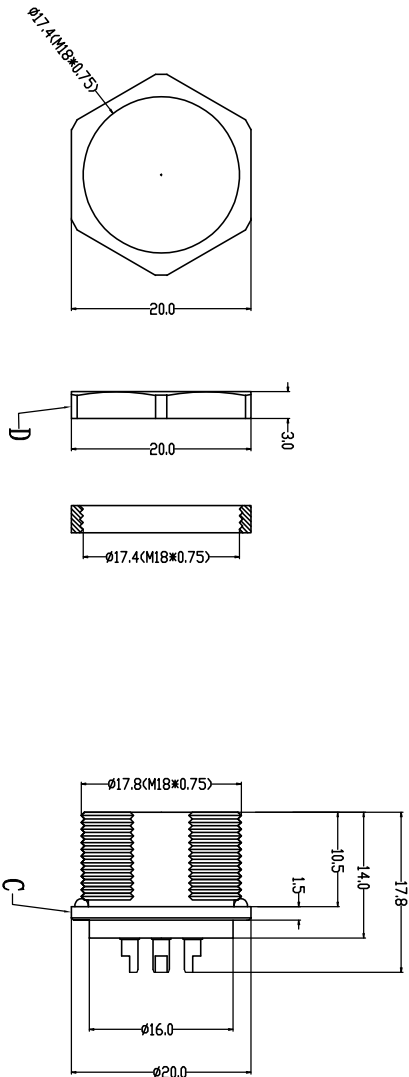

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLACK	1
B CONTACT	BRASS	GOLD PLATED	2~24
C OUTER CONTACT	BRASS	NICKL. PLATED	1
D NUT	BRASS	NATURAL COLOR	1
E O-RING	EPDM	RED/BLACK	1+1

Dongguan Changjun ElectronicsCo., LTD
东莞市昌骏电子有限公司

Engagement force	≤60N	Rated voltage	2~8pin: 220V 12~19pin: 60V 24pin: 60V
Disengagement force	≥15N	Rated current	2~8pin: 5A 12~19pin: 3A 24pin: 1A
Mechanical lifespan	≥1500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---