

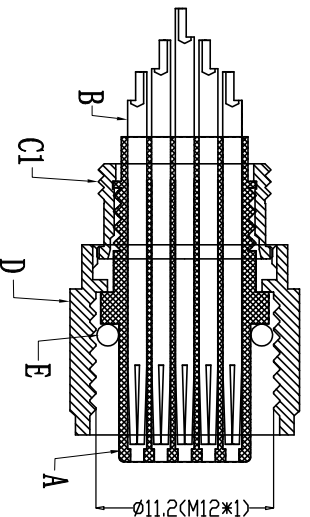
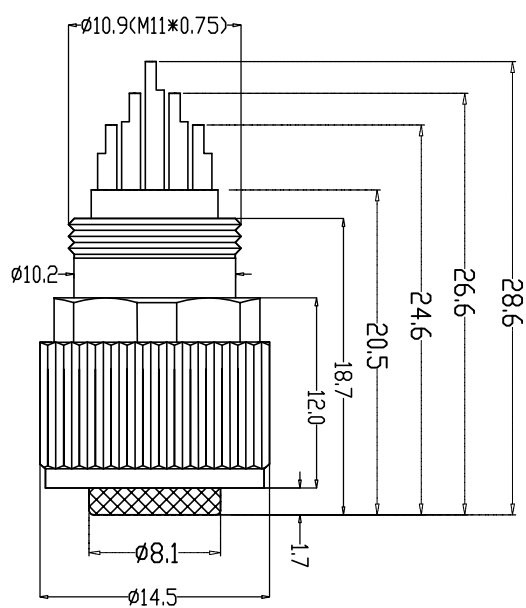

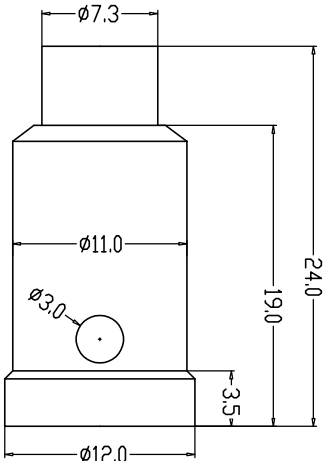
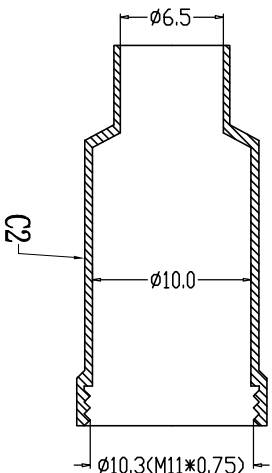


1		2		3		4		5		6			
A		B		C		D		E		F			
9pin	10pin	11pin	12pin	13pin	14pin	15pin	16pin	17pin					
										A			

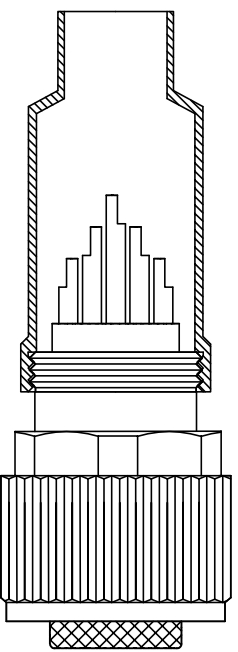

1		2		3		4		5		6	
H		G		F		E		D		C	
Engagement force		Rated voltage		Rated current		Rated voltage		Rated current		Rated voltage	
Disengagement force		Rated current		Rated voltage		Rated current		Rated voltage		Rated current	
Mechanical lifespan		Insulation resistance		Contact resistance		Insulation resistance		Contact resistance		Insulation resistance	
IP rating		IP67/IP68		Contact resistance		IP67/IP68		Contact resistance		IP67/IP68	
Flammability		UL94 V-0		Operation Temperature		-40° C~105° C		Operation Temperature		-40° C~105° C	
1		2		3		4		5		6	
PARTS		MATERIALS		TREATMENT		AMOUNT					
A		HOUSING		PA66+GF		SPECIFY COLOR		1			
B		CONTACT		BRONZE		GOLD PLATED		9~17			
C		OUTER CONTACT		BRASS		NICKL PLATED		1+1			
D		NUT		BRASS		NICKL PLATED		1			
E		O-RING		EPDM		SPECIFY COLOR		1			
F											
TOLERANCE		TITLE:		DRAWING NO.:		CP-M120600					
.xxx		M12防水17Pin线束母头的装配图 版本:1.0 六角直纹螺母-24 规格:符合		PART NO.:		CJ-M12C(9~17)A-F81					
.xx		SHEET:		SCALE:		1:1					
x		1 / 1		1:1		mm					
ANGLE		±1°		DRAWN:		Xie Wenjun					
				CHECK:		Long Jichang					
				DATE:		2025-10-28					

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司