





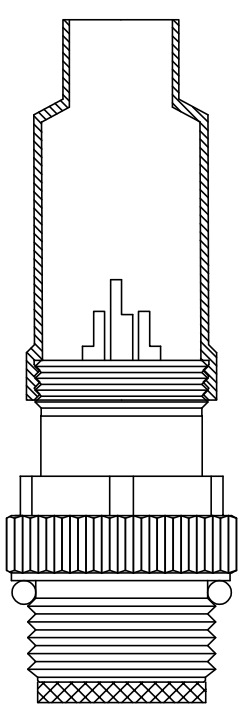



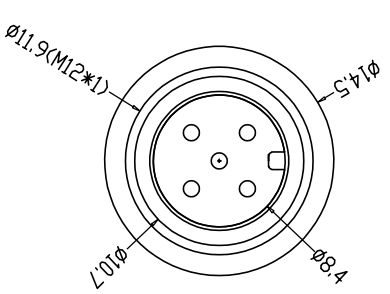
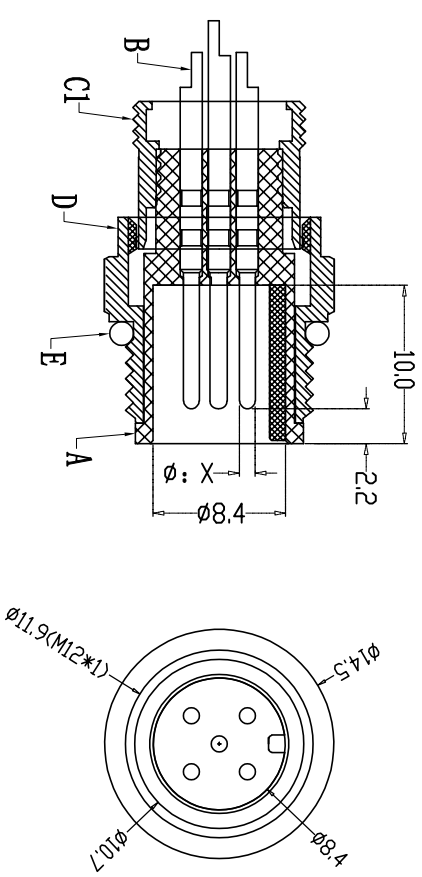


		1		2		3		4		5		6		7		8	
A	pin位	2pin	3pin	4pin	5pin	6pin360°	6pin	7pin	8pin								
	X 值	1.00	1.00	1.00	1.00	1.00	0.80	0.80	0.80								
	A-CODE 图形																
B-CODE 图形																	

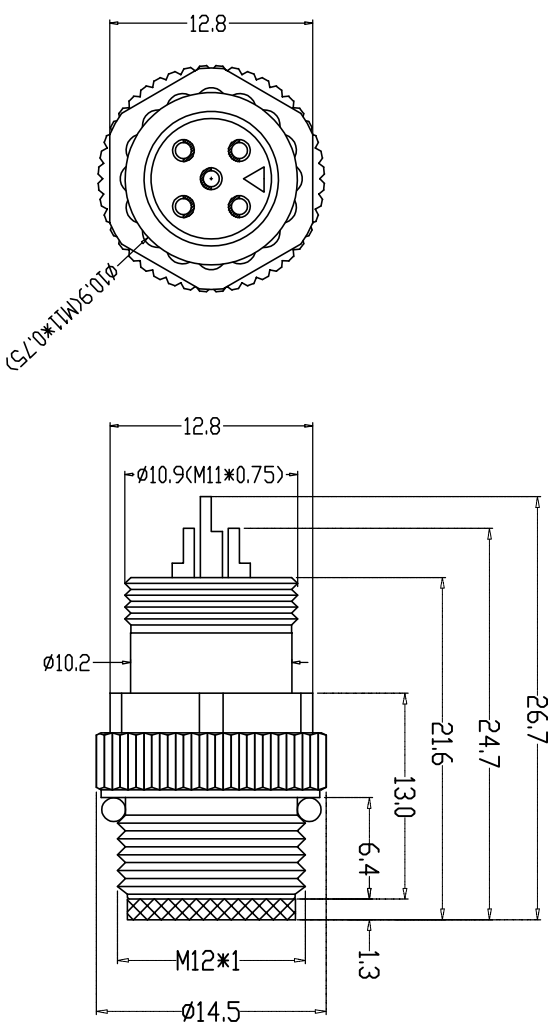

D-CODE 图形			
--------------	--	---	---

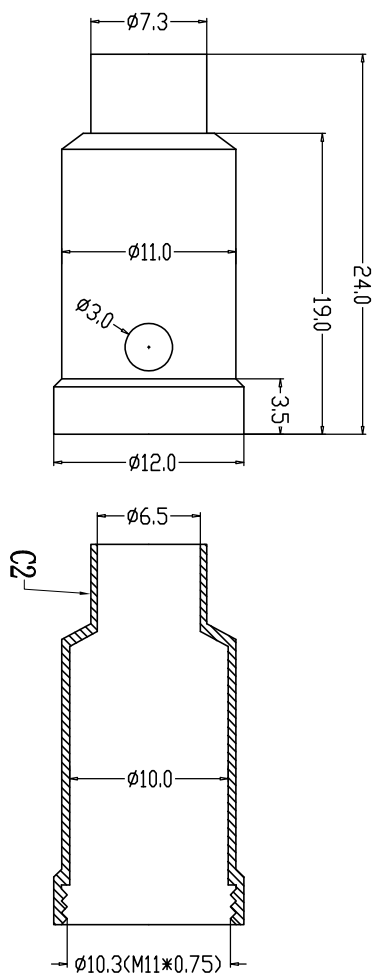

G	Dongguan Changjun ElectronicsCo., LTD										G
	东莞市昌骏电子有限公司										
	TITLE: W1208 60° 80° 线端公头防震动连接器:120°大角直收螺丝:2.0mm螺距管										
	TOLERANCE xxx ±0.05 ±0.10 xx ±0.30 ±0.50 x ±1° ANGLE										
	PART NO: CJ-M12C(2°8)-A-M82 DRAWING NO.: CP-M120598 SHEET: SCALE: UNIT: SIZE: REV A/0										
H	DRAWN: Xie Wenjun CHECK: Long Jichang DATE: 2025-10-28										H
											
Engagement force		≤50N	Rated volage	2.5pin:60V 6.8pin:80V	B	CONTACT	BRASS	GOLD PLATED	2~8		
Disengagement force		≥5N	Rated current	2.5pin:4A 6.8pin:2A	C	SHIELD	BRASS	NICKEL PLATED	1+1		
Mechanical lifespan		≥500	Insulation resistance	≥1000M Ω	D	NUT	BRASS	NICKEL PLATED	1		
IP rating		IP67/IP68	Contact resistance	≤10m Ω	E	0-RING	SILICA GEL	BLACK	1		
Flammability		UL94 V-0	Operation Temperature	-40° C~105° C	F						