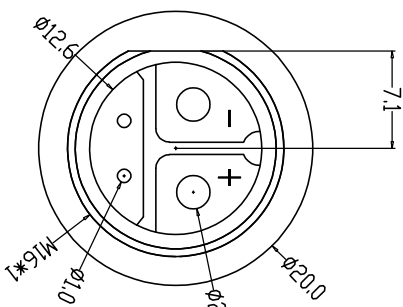
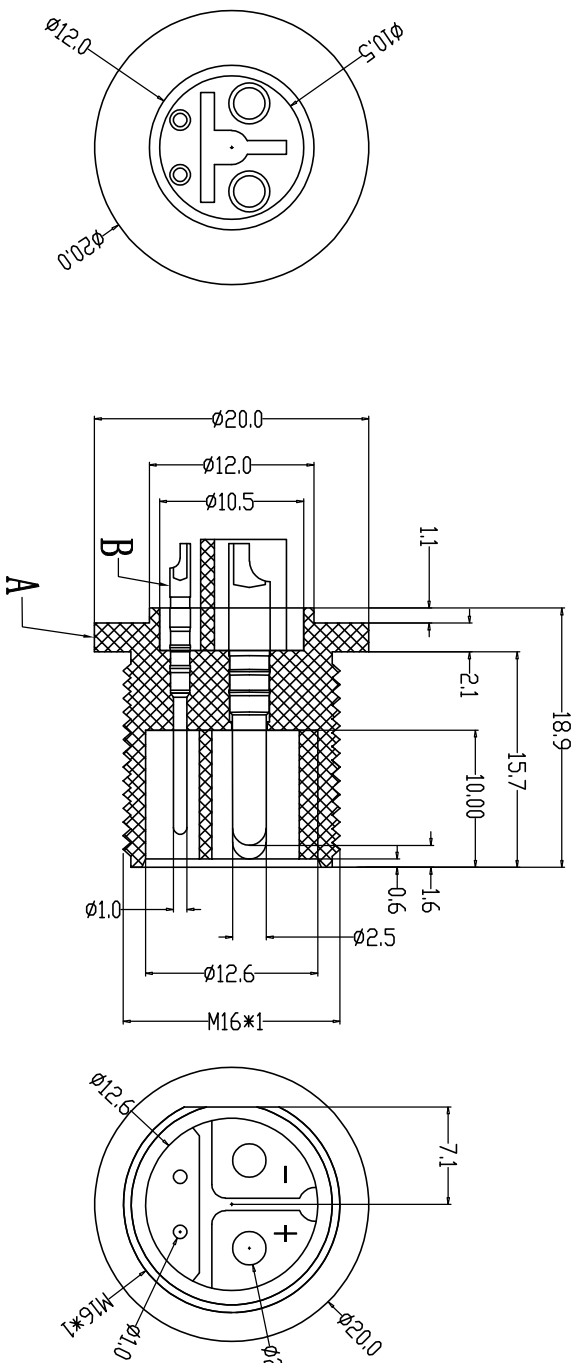
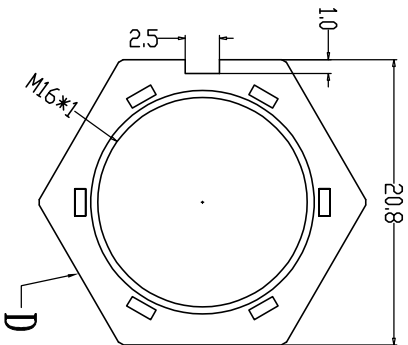
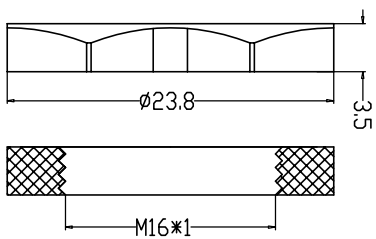
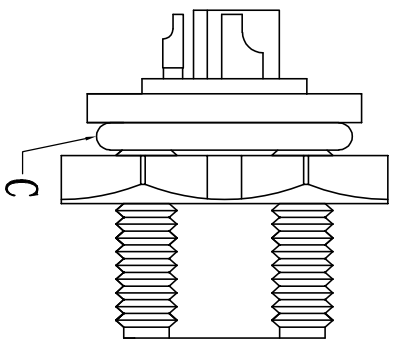


Recommended Panel Cut-out

G	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司					
	PARTS		MATERIALS	TREATMENT	AMOUNT	
	A	HOUSING	PA66+GF	BLACK	1	
	B	CONTACT	BRASS	GOLD PLATED	4	
	C	O-RING	EPDM	RED	1	
H	Engagement force	≤50N	Rated voltage	60V		
	Disengagement force	≥15N	Rated current	25A		
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω		
	IP rating	IP67	Contact resistance	≤10m Ω		
	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C		