

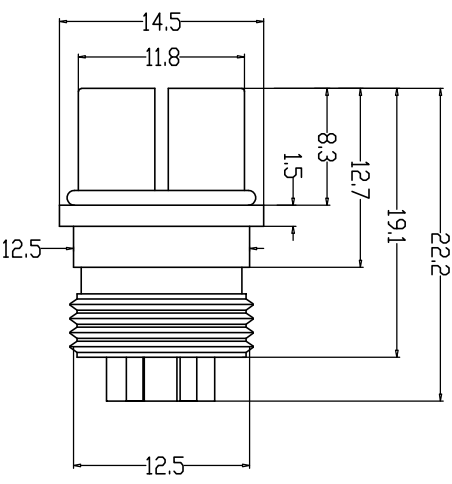
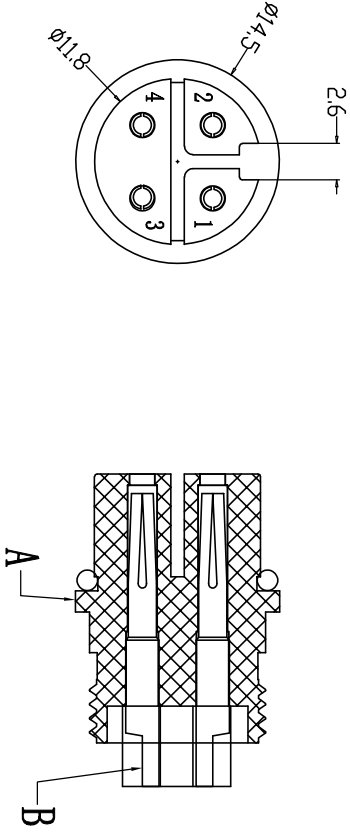
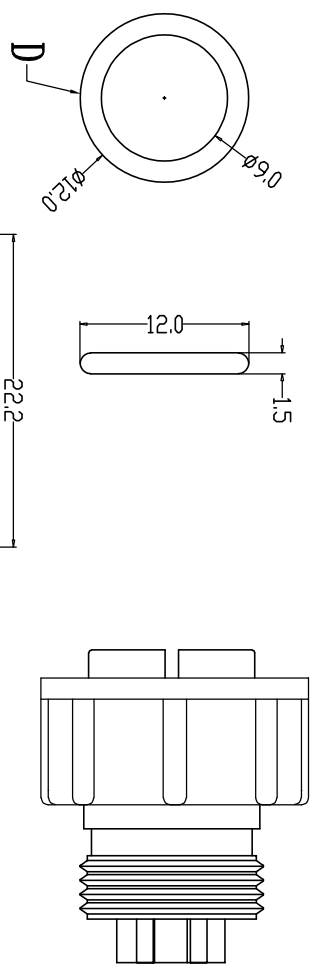


1		2		3		4		5		6		7		8			
PIN数		2p偏心款		2p居中款		4改2		3pin		4改3		4pin		2+2		2+4	
图形																	
接触直径		1. 50mm		1. 50mm		1. 50mm		1. 50mm		1. 50mm		1. 50mm		2. 00mm+1. 00mm		2. 00mm+1. 00mm	

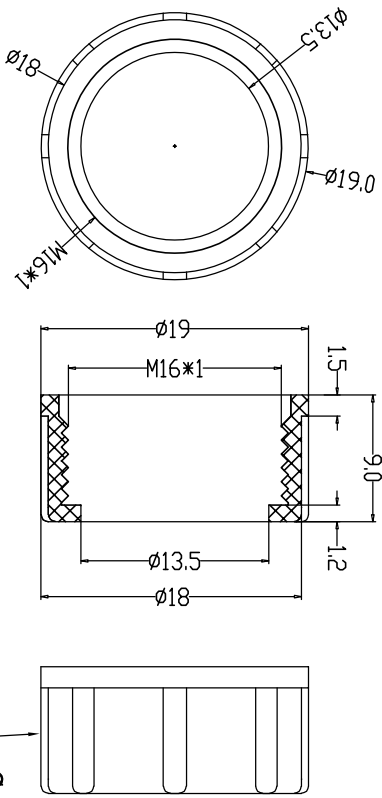

G	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司										G			
	PARTS		MATERIALS	TREATMENT	AMOUNT	TOLERANCE ±0.05 ±0.10 ±0.30 ±0.50 x x x ANGLE ± 1°								
	A	HOUSING	PA66+GF	SPECIFY COLOR	1	TITLE: M16防水线端接头+密封胶螺母								
	B	CONTACT	BRONZE	GOLD PLATED	2~6	PART NO.: CJ-M16ZXB(Z'6)-F01 SHEET: SCALE: UNIT: SIZE: REV 1 / 1 1 : 1 mm A/0								
H	Engagement force	≤30N	Rated volage	60V	B	CONTACT	BRONZE	GOLD PLATED	2~6	DRAWING NO.: CP-M16Z001				
	Disengagement force	≥10N	Rated current	1.55~7.5A 2.0~20A	C	NUIT	PA66+GF	BLACK	1	DATE:				
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	0-RING	EPDM	BLACK	1	CHECK: Xie Wenjun Long Jichang 2022-01-05				
	IP rating	IP67	Contact resistance	≤10m Ω	E						DATE:			
	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C	F									