
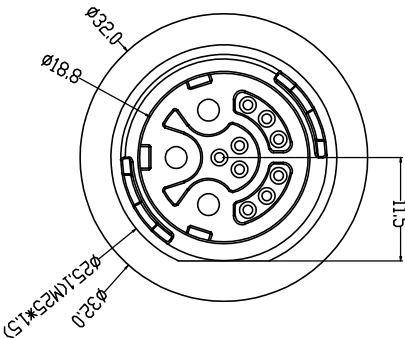
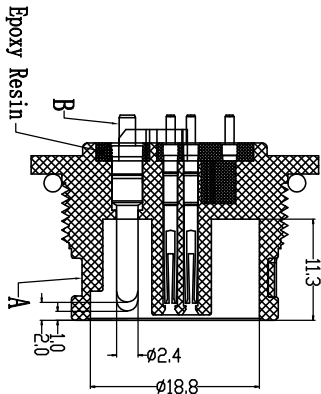
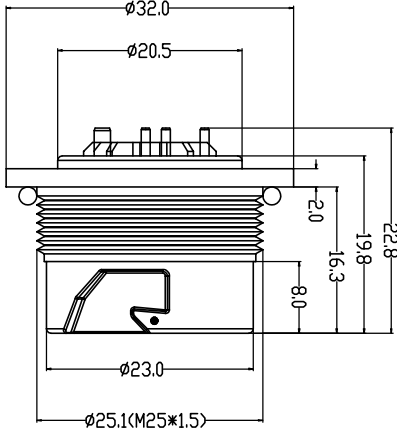
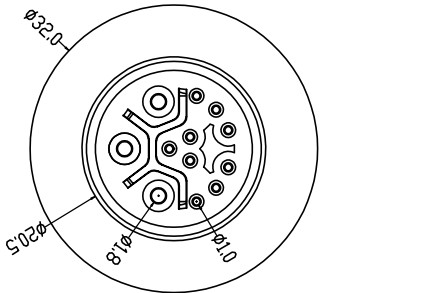

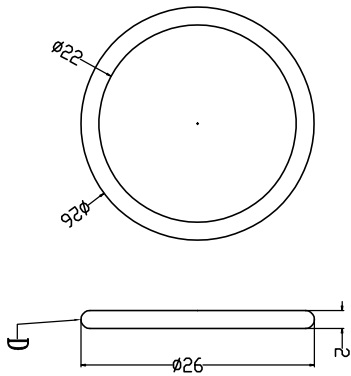
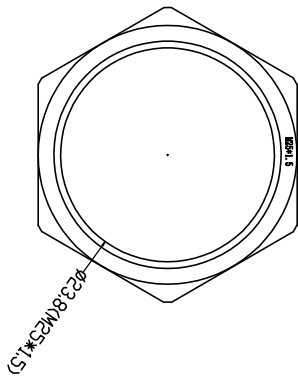


Recommended Panel Cut-out

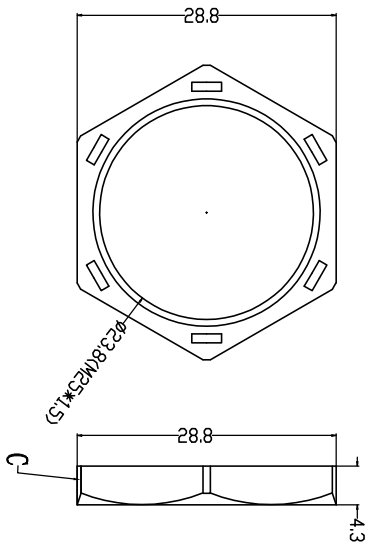

G					Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司							
	PARTS		MATERIALS	TREATMENT	AMOUNT							
	A	HOUSING	PA66+GF	BLACK	1							
	B	CONTACT	BRASS	NICKEL PLATED GOLD PLATED	3+9							
	Engagement force	≤80N	Rated volage	220V		TOLERANCE · xxx ±0.05 · xx ±0.10 · .xx ±0.30 · x ±0.50 ANGLE ± 1°						
H	Disengagement force	≥20N	Rated current	20A	C	NUT	PA66+GF	BLACK	1	TITLE: 23型推拉自锁3+9板端公头 前锁面板式M25 F32T-22.8L PART NO: CP-2325003 SHEET: 1 / 1 SCALE: 1 : 1 UNIT: mm SIZE: A4 REV: A/0		
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	0-RING	SILICA GEL	WHITE	1	DRAWN: Xie Wenjun CHECK: Long Jichang DATE: 2025-04-08		
	IP rating	IP67	Contact resistance	≤10m Ω	E							
	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C	F							