
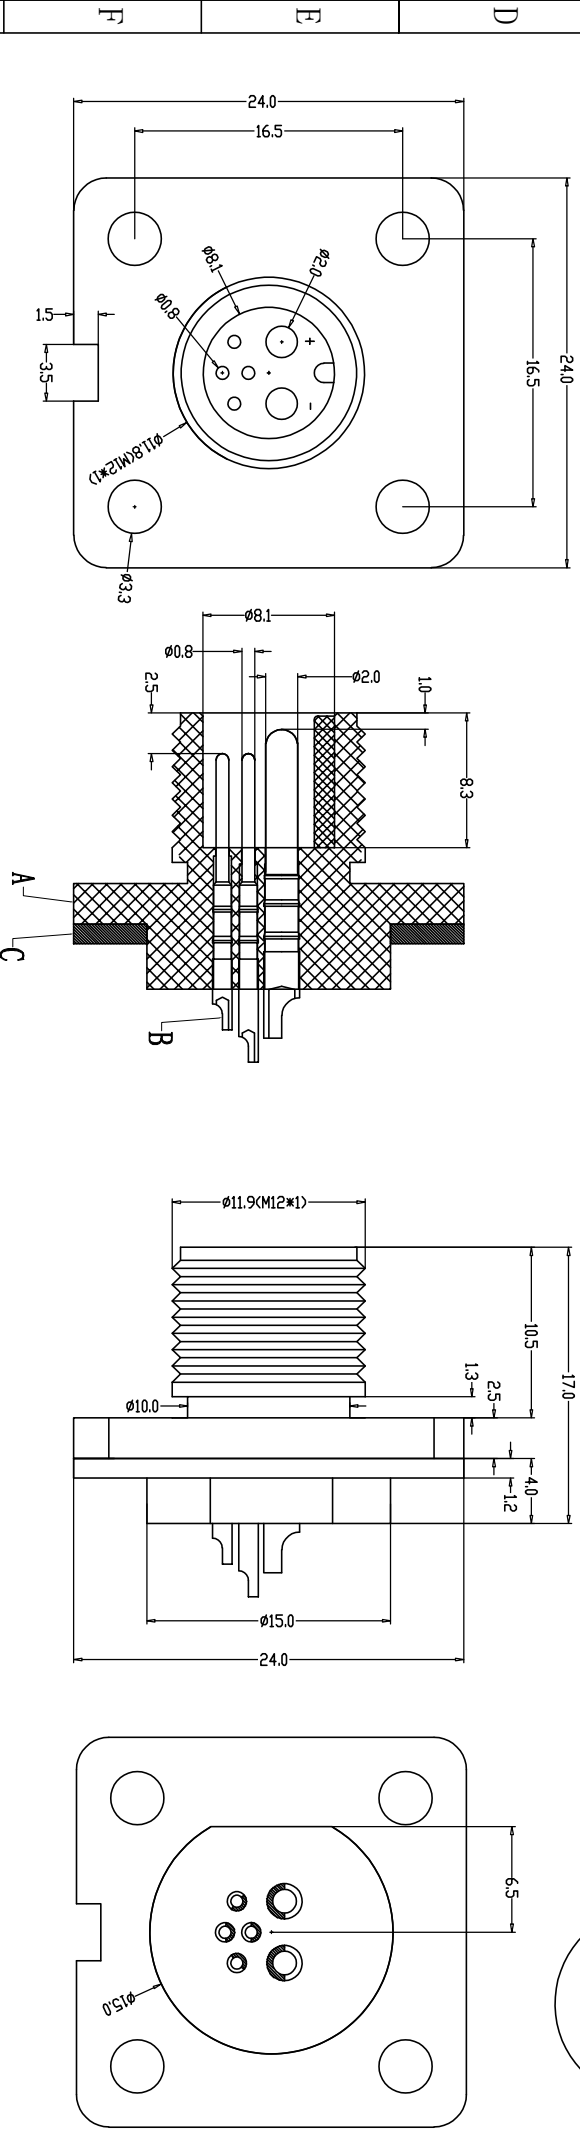


1	2	3	4	5	6	7	8
图形							
PIN数	2pin	2+2	2+3	2+4			

Recommended Panel Cut-out

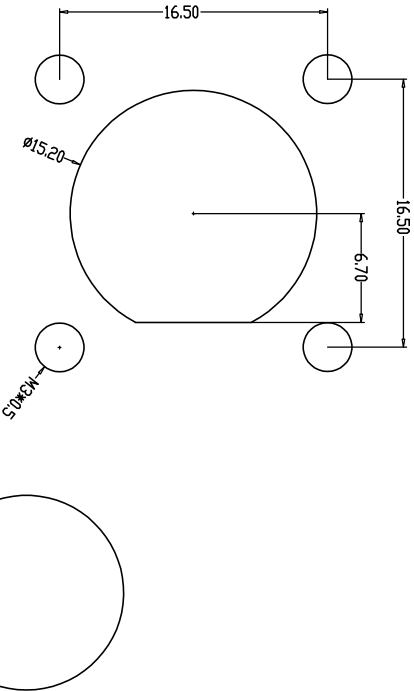

G					Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司				
			PARTS	MATERIALS	TREATMENT	AMOUNT			
			A	HOUSING	LCP+GF	NATURAL COLOR	1		
			B	CONTACT	BRASS	GOLD PLATED	2+4		
			C	0-RING	SILICA GEL	SPECIFY COLOR	1		
	Engagement force	≤50N	Rated voltage	220V					
	Disengagement force	≥10N	Rated current	20A					
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω					
	IP rating	IP67	Contact resistance	≤10m Ω					
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F				
H									
					TOLERANCE				
					. xxx ±0.05 ±0.10 . xx ±0.30 x ±0.50 x ± 1° ANGLE				
					TITLE: T-M12防水线端头 法兰面板式M12 S24T				
					PART NO: DRAWING NO.: CP-M12T0016				
					SHEET: SCALE: UNIT: SIZE: REV				
					1 / 1 1 : 1 mm A4 A/0				
					DRAWN: CHECK: DATE: Xie Wenjun Long Jichang 2026-05-19				