






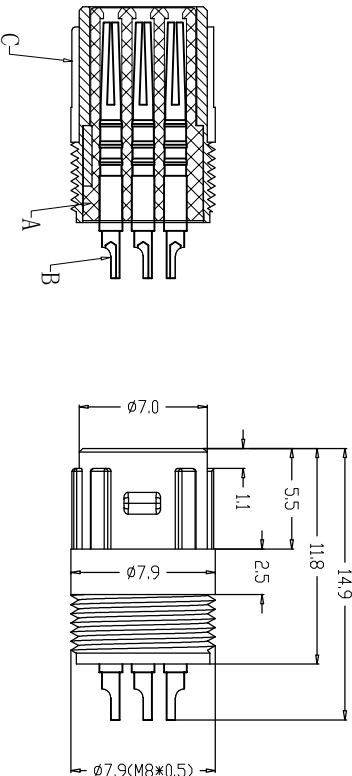

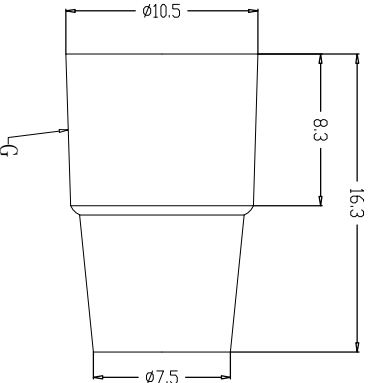


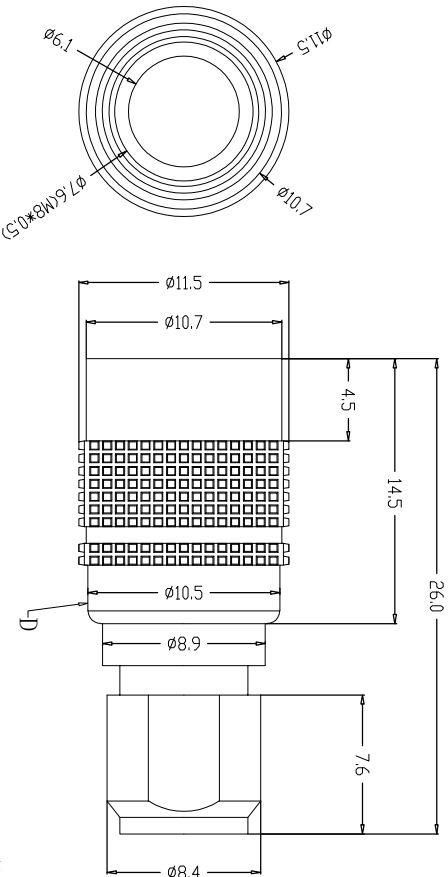


PIN数	4pin	5pin	6pin	7pin
图形				

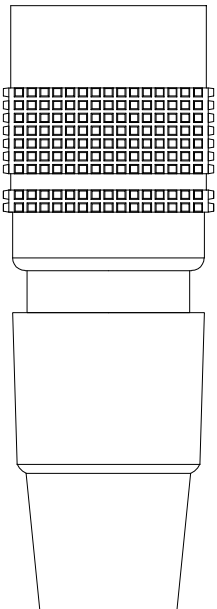

Engagement force	≤20N	Rated volage	AC:100V DC:140V
Disengagement force	≥5N	Rated current	2A
Mechanical lifespan	≥1000	Insulation resistance	≥1000MΩ
IP rating	IP65	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLACK	1
B CONTACT	BRONZE	GOLD PLATED	4~7
C SHELL	ZINC ALLOY	NICKL. PLATED	1
D SHELL+SPRING	BRASS + SS	NICKL. PLATED	1
E NUT	SS	BLACK	1
F CLAMP	BRASS	NATURAL COLOR	1
G SHEATH	TPE	BLACK	1

Dongguan Changjun Electronics Co., Ltd			
东莞市昌骏电子有限公司			
TOLERANCE		TITLE:	
±0.05		DRAWING NO.:	
±0.10		CP-HR10A0003	
±0.30		SIZE:	
±0.50		REV	
ANGLE		A/0	
± 1°		DATE:	
DRAWN:		CHECK:	
Xie Wenjun		Long Jichang	
SHEET:		2026-05-29	
1 / 1			
SCALE:			
1 : 1			
UNIT:			
mm			