
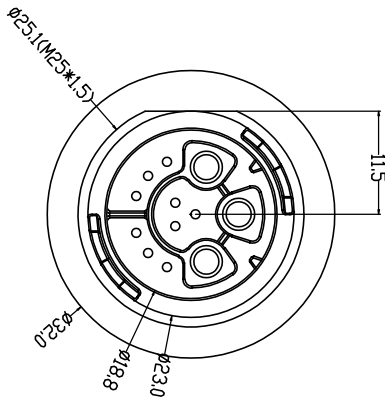
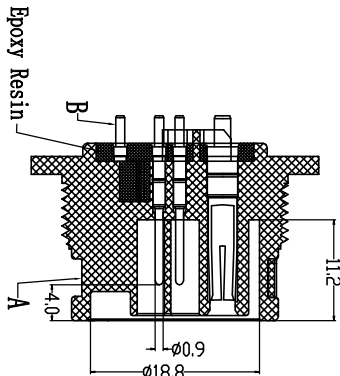
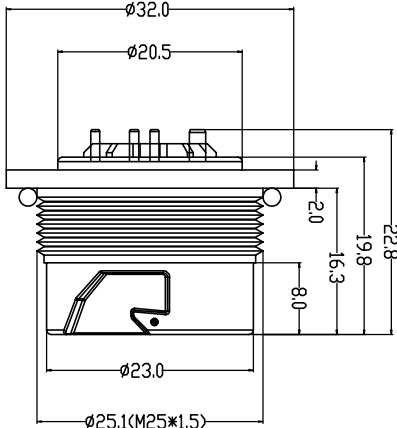




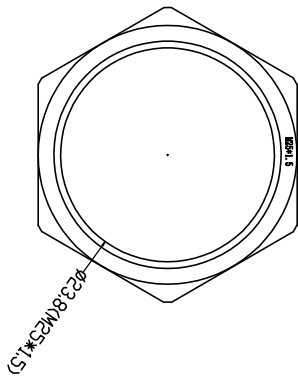


Recommended Panel Cut-out

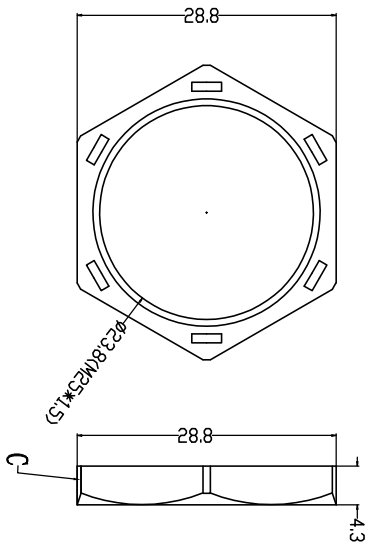

				PARTS	MATERIALS	TREATMENT	AMOUNT	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司			
				A	HOUSING	PA66+GF	BLACK	1	TITLE: 23型推拉自锁3+9板端母头 前锁面板式M25 F32T-22.8L PART NO: C1-2523AMB-F010-M25F32T-22.8L SHEET: 1 / 1 SCALE: 1 : 1 DRAWING NO.: CP-2325004 UNIT: mm SIZE: A4 REV: A/0		
				B	CONTACT	BRASS	NICKEL PLATED GOLD PLATED	3+9			
				C	NUT	PA66+GF	BLACK	1			
				D	O-RING	SILICA GEL	WHITE	1			
				E							
				F					DRAWN: Xie Wenjun CHECK: Long Jichang DATE: 2025-04-08		
				G	Engagement force	≤80N	Rated voltage	220V			
				H	Disengagement force	≥20N	Rated current	20A			
				I	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω			
				J	IP rating	IP67	Contact resistance	≤10m Ω			
				K	Flammability	UL94 V-0	Operation Temperature	-25° C~105° C			