

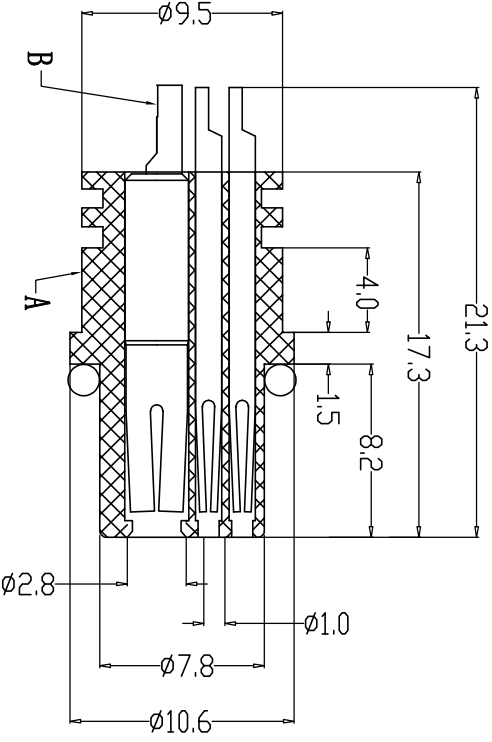
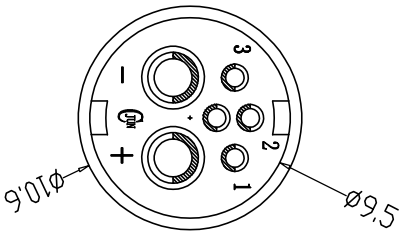
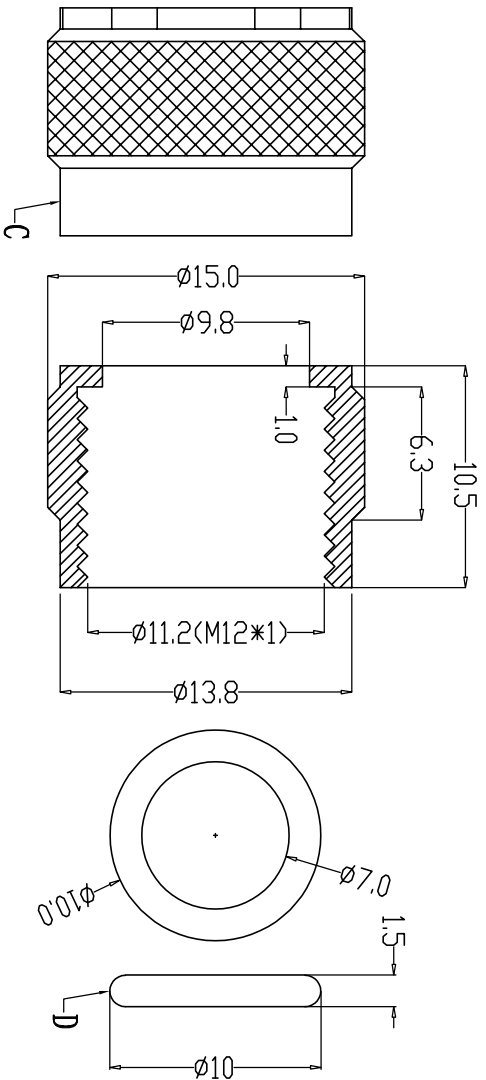


1	2	3	4
图形			
PIN数	2pin	2+2	2+4

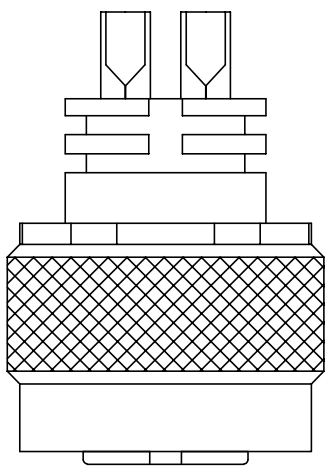

1	2	3	4	5	6	7	8
Engagement force	≤20N	Rated volage	220V				
Disengagement force	≥5N	Rated current	20A				
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ				
IP rating	IP67	Contact resistance	≤10mΩ				
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C				
			PARTS				
			A	HOUSING	MATERIALS	TREATMENT	AMOUNT
			B	CONTACT	BRONZE	GOLD PLATED	2+4
			C	NUT	POM	BLACK	1
			D	O-RING	EPDM	BLACK	1
			E				
			F				
			TOLERANCE				
			TITLE:				
			1-M12防水线端母头+0MM网纹螺母				
			DRAWING NO.:				
			CP-M12T0011				
			SHEET:				
			SCALE:				
			UNIT:				
			SIZE:				
			REV				
			A/0				
			DATE:				
			2026-05-19				

Dongguan Changjun ElectronicsCo., LTD
东莞市昌骏电子有限公司