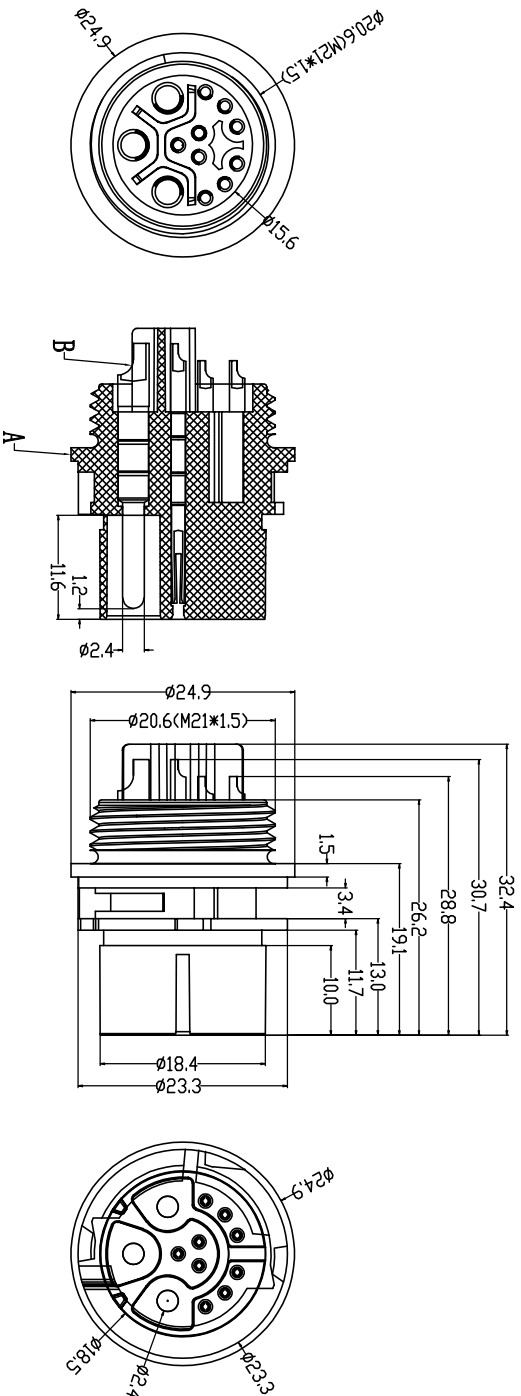

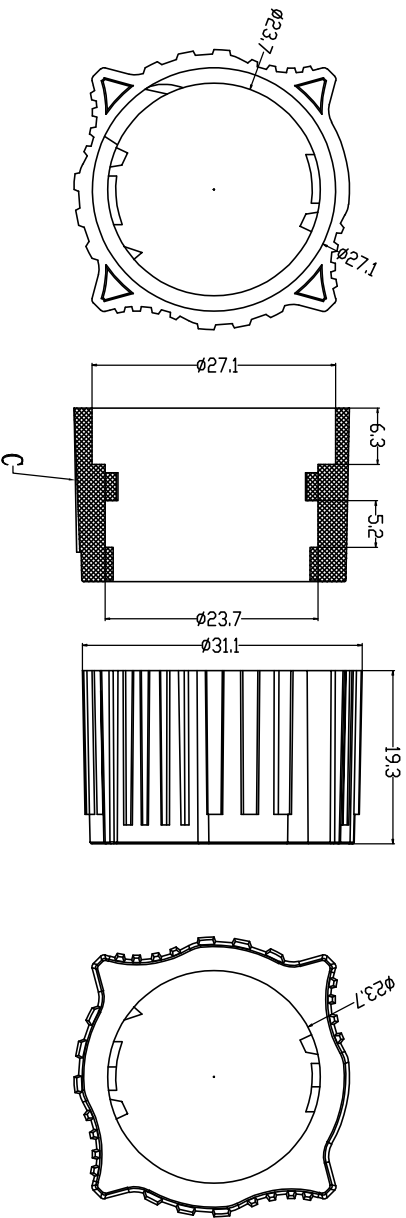


		PARTS		MATERIALS		TREATMENT		AMOUNT	
A		HOUSING		PA66+GF		BLACK		1	
B		CONTACT		BRASS		NICKI PLATED GOLD PLATED		3+9	
C		NUT		PA66+GF		BLACK		1	
D		SPRING		SS		NICKI PLATED		1	
E		O-RING		SILICA GEL		WHITE		1	
F									
G									
H									
I									
Engagement force		$\leq 80N$		Rated voltage		220V			
Disengagement force		$\geq 20N$		Rated current		20A			
Mechanical lifespan		≥ 500		Insulation resistance		$\geq 1000M \Omega$			
IP rating		IP67		Contact resistance		$\leq 10m \Omega$			
Flammability		UL94 V-0		Operation Temperature		$-25^{\circ}C \sim 105^{\circ}C$			

Dongguan Changjun ElectronicsCo., LTD
东莞市昌骏电子有限公司

TITLE: 23型推拉自锁3+9线端公头

TOLERANCE		PART NO.:		DRAWING NO.:	
.xxx		CJ-ZS23AX9-M01		CP-2325002	
.xx		SCALE:		UNIT: mm	
.x		1 / 1		A4	
x		1 : 1		SIZE: A/0	
ANGLE		DRAWN: Xie Wenjun		CHECK: Long Jichang	
$\pm 1^{\circ}$		DATE: 2025-03-28			